
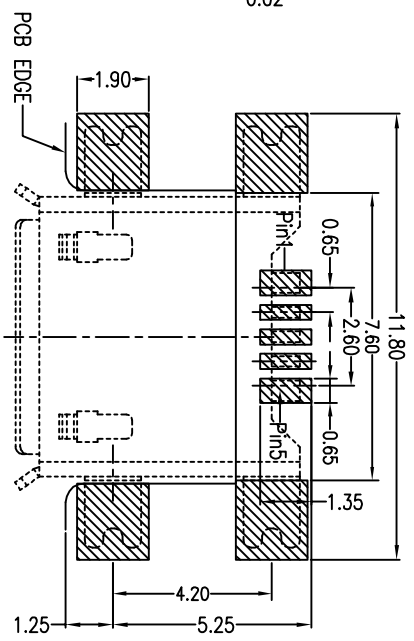
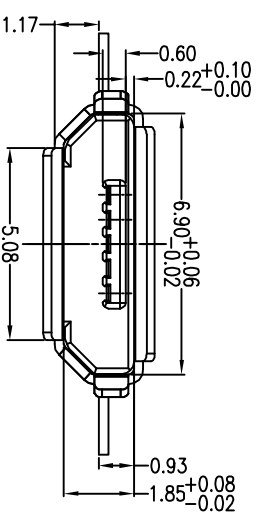
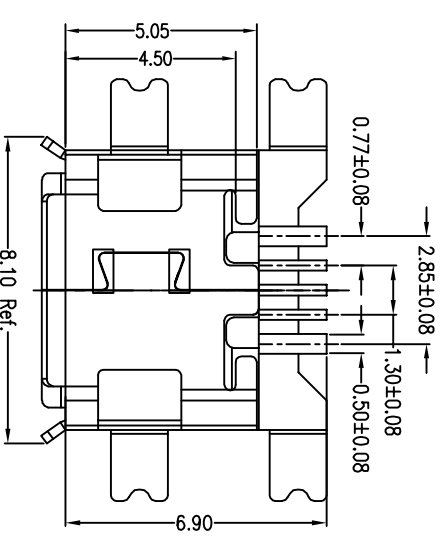

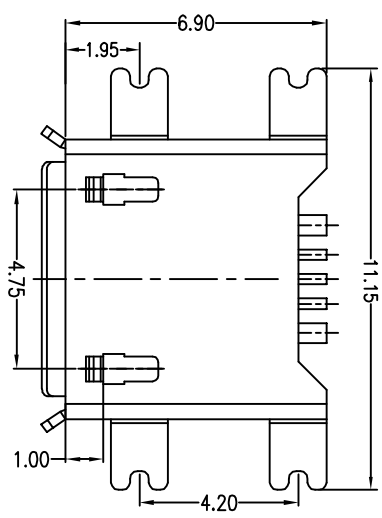
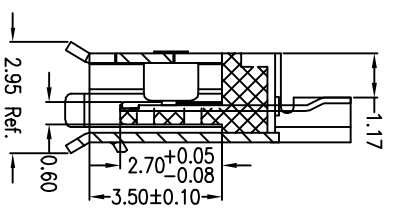


REV.	ECH NO	LOCATIONS	DESCRIPTION	DATE

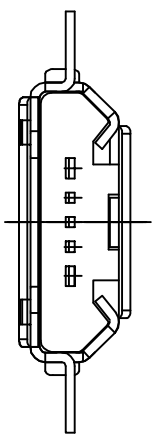

RECOMMENDED PCB LAYOUT
PCB圖仅供参考

- Note:
1. Material:
 - 1.1 Housing: High temperature thermoplastic with g.f.U.L94V-0
 - 1.2 Contact: copper alloy,t=0.15mm
 - 1.3 Shell: copper alloy,t=0.25mm
 2. Specification:
 - 2.1 Current rating: 3A Max. voltage: 100 V(ac) for 1 min.
 - 2.2 Dielectric withstanding
 - 2.3 Contact resistance: 30 MΩ Max.
 - 2.4 Insulation resistance: 100 MΩ Min.
 - 2.5 Total mating force: 3.57 Kgf Max.
 - 2.6 Total unmating force: 1.0 Kgf Min.
 - 2.7 Temperature range: -30°C~80°C

A 01 S B 1 4 1 B 4-394

- 1 产品代号 A: 样品
- 2 产品系列 01: micro usb 5pin
- 3 产品类别 S: 插座
- 4 产品类型 B: B TYPE
- 5 外壳材质 1: 2580R-H
- 6 端子材质 4: 05191R-BH
- 7 主体材质 1: LCP
- 8 主体颜色 B: 黑色
- 9 下板类型 4: 液板式
- 10 细节序号 04: micro usb 5s B Type (液板式) 17: 5pin埋座全脚; 5pin直脚

PART NO:	A01SB141B4-394	MATERIAL:	SEE NOTE
MODEL NO:	XX	FINISH:	SEE NOTE
UNIT:	MM	SIZE:	A4
TOLERANCE UNSPECIFIED	.X	DR:	zhiyoutong
	.XX	CHK:	
	.XXX	APP:	
	Ang.		

TITLE:		Micro usb 5s B Type 液板式 1.17 Smt埋座全脚; 5pin直脚	
DWG NO:	SHK-20046	SCALE:	5:1
DATE:	2014.04.10	REV:	A

深圳市虹康科技有限公司

