
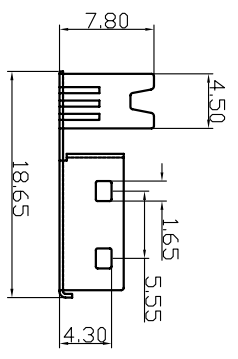


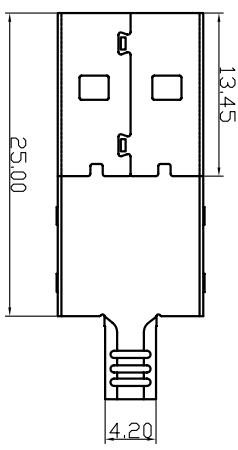




9	8	7	6	5	4	3	2	1	
ECN NO.		ECN DESCRIPTION		REV.	DATE	APPD.			
/		/		A	2014.09.27	pcy			

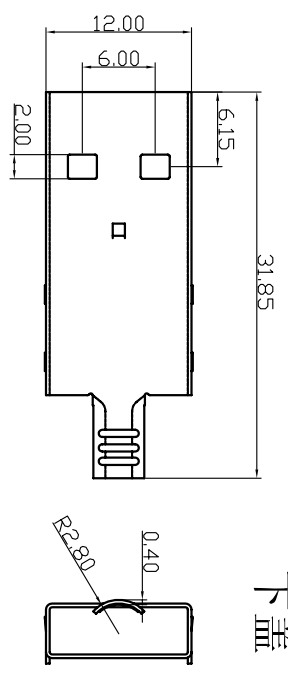

上盖

半成品

- Remark:
- MATERIAL:
 - Housing:thermoplastic plastics.
 - terminals:Copper Alloy
 - Front Shell:Copper Alloy/SPCC.
 - characteristics:
 - Rating Voltage : 30V AC.
 - Rating Current:PIN1&PIN4(Vbus&Corresponding ground PIN)
 - 1.8A MAX Other PINS 0.25A min.
 - Contact Resistance:PIN1&PIN4:30 mΩ MAX. Other PINS: 50 mΩ
 - Insulation Resistance:100 MΩ MIN.
 - Withstanding Voltage:AC 100V between adjacent contacts
 - Mating force: 3.57Kgf MAX(35N MAX)
 - Extraction force:1Kg^f Min(9.8N Min)
 - Life test:1500Cycles MIN.
 - Temperature Range: -30℃~+80℃.

- U315-014X-XXXXXR
- Iron alloy
 - Ni plating
 - Copper alloy
 - Ni plating
 - Au 1u"
 - Au 3u"
 - Au 5u"
 - Au 10u"
 - Au 15u"
 - Au 30u"

- 1:tray
- 2:Tube
- 7:PE Bag
- 1:Black
- 7:Blue 300C
- 8:Blue 300C-1
- C:Blue 300C-2
- E:Blue 300C-3
- 9:Carbon black425C
- 1:PA66
- 2:PBT
- 6:LCP

深圳市虹康科技有限公司

PART NAME: SHK-30139 AM三件式

PART No: SHK-30139

CHECKED: pengchaoyong

DATE: 2014.09.27

9 8 7 6 5 4 3 2 1