

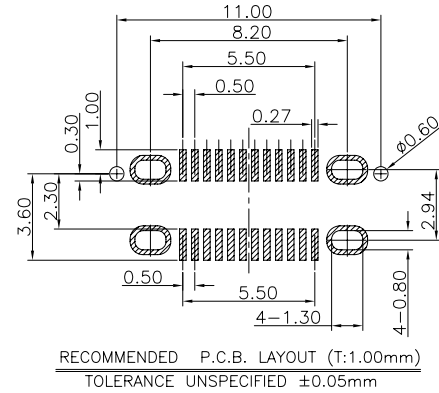
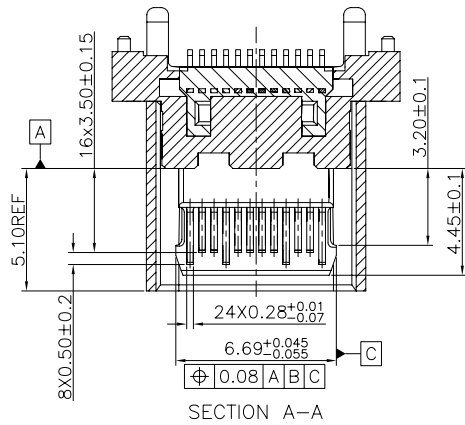
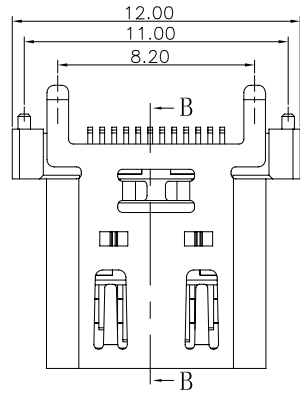
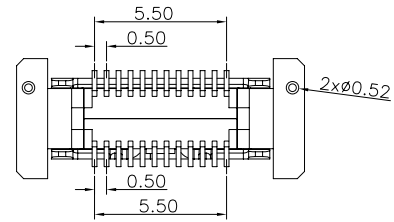





REV	ECN No.	DATE	REMARK
A0	NEW	2017.03.21	NEW RELEASE

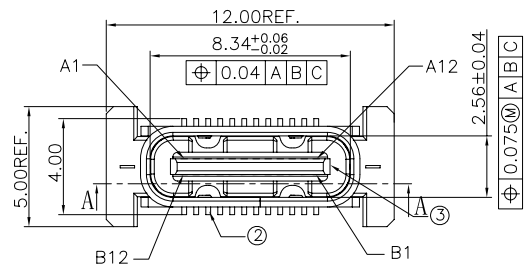

- NOTES:
SPECIFICATION:
- CURRENT RATING: 3.0A MAX
 - Withstanding Voltage: 100V AC
 - TEMPERATURE RANGE: -30 °C ~ 85 °C
 - CONTACT RESISTANCE: 40 MILLIONHM MAX
 - INSULATION RESISTANCE: 100 MEGOHMS
 - INSERTION FORCE : 5N~20N
 - UNMATING FORCE: 8N~20N (1~1000次)
6N~20N (10000次之后)
 - DURABILITY: 10,000 CYCLES

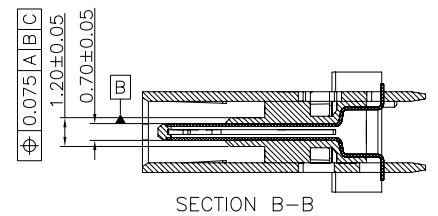

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

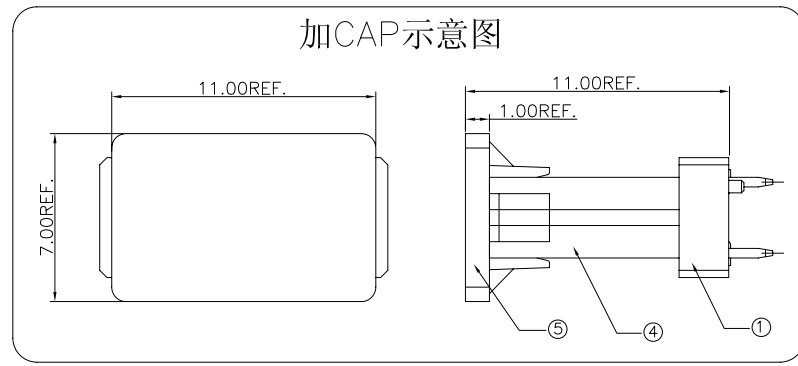

NO.	PART NO.	NO.	DESCRIPTION	MATERIAL	REMARKS	QTY	备注	PACKAGING
5	CAP	LCP S475 UL94V-0	BLACK		1PCS			
4	SHELL	SUS304 T=0.40mm	Ni 50u" Min Plated		1PCS			
3	LATCH	SUS301 T=0.20mm	NO PLATED		1PCS	48H	Reel	
2	CONTACT	C1814 T=0.12mm	Au 30u" PLATING ON CONTACT AREA; TIN 80u" Min TING ON SOLDER TAIL; Ni 50u" Min UNDERPLATING OVERALL		1SET			
1	HOUSING	LCP S475 UL94V-0	BLACK		1PCS			

MATERIAL NO.: Z-CF036XXXXX-X-01

REVIEW TABLE FOR DETAILS

QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)	TITLE	DRAWN BY	DATE
0	x.xxxxx	深圳市虹康科技有限公司	SAM	2016.03.04
0	x.xxx	USB C F 直立式四脚插板	CHECKED BY	DATE
0	x.xx		JAY	2016.03.04
0	x.x	DOCUMENT NO.	APPROVED BY	DATE
0	ANGULAR	SHK-31385	JACKY	2016.03.04

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ZDT TECHNOLOGY. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION STYLE: MM ONLY | DESIGN UNITS: METRIC | SHEET NO: 1 OF 1 | SCALE: 5:1 | THIRD ANGLE PROJECTION