

REV.	MODIFICATION	ECN No.	NAME	DATE
A/1				2009-06-24


产品规格说明: (specifications)  
 电器特性: (Electrical characteristics)

- 最大值30毫欧: (30 milliohms MAX)
- 耐电压: (Dielectric Withstanding Voltage):  
500 伏特交流电 (500V AC At Sea Level)
  - 绝缘阻抗: (Insulation Resistance):  
最小值1000欧(微姆 (1000 mega-ohms MIN))

材料:Material:

1. 塑胶: (Housing): High Temperature Inertplastics,  
 U1 94V-0  
:Black :White :其它  
:FR1 :耐高温塑胶 LCP :其它
2. 端子: (Contact): C2680 C35191
3. 外壳: (Shell): C2680 SPPC-SB SPCC-SB
- 电镀: (Finish):  
 1. 端子: (Contact): Plated Gold in Mating Area:  
 Tin On Solder Tails  
 接触点镀金, 脚镀锡。
2. 外壳: (Shell): Nickel Plating 镀亮镍。  
 接触点镀金 'u' 3u' 5u' 15u' 30u' 脚镀锡。

注明: 1. 标示编号为\*重点检测尺寸, 图纸部分仅供参考, 因技术改良, 客户不同需求, 部分细节会与实物有区别, 请以实物为准。

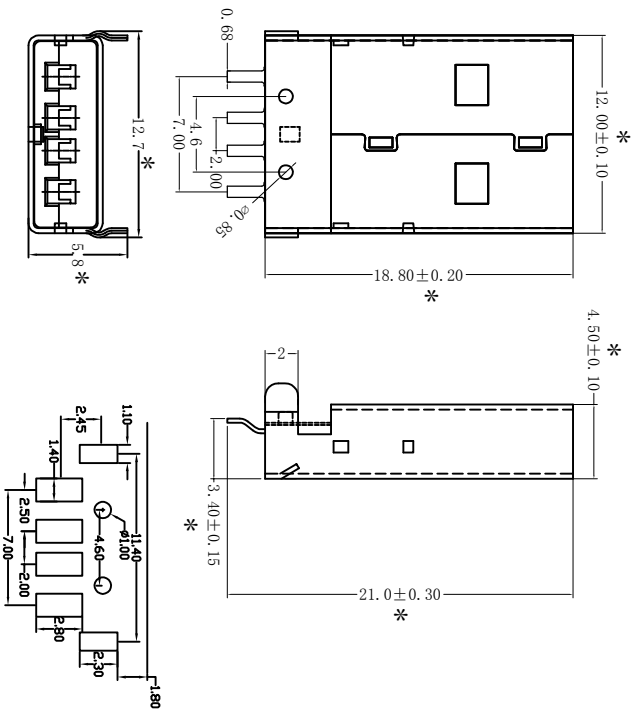

产品名称: PRODUCT NAME		料号: Part No.		模号: Mold No.		表面: Surface	
虹康180度 (有定柱柱)		SHK-20290					
核准: Approved by		审核: Checked by		制图: Drawn by		THIRD ANGLE	
虹康科技						REV.: A/0 SCALE: FITT UNIT: mm SHEET: 1 OF 1 GENERAL TOLERANCES	
X. ±0.30 X°. ±2°		.X ±0.25 .X° ±0.5°		.XX ±0.20 .XX° ±0.3°			

深圳市虹康科技有限公司

A B C D E F 1 2 3 4 5 6 7 8