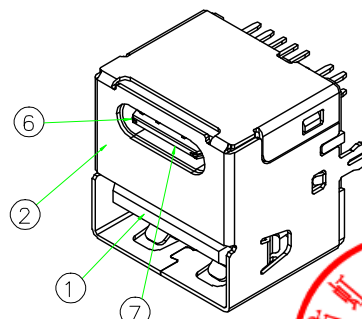
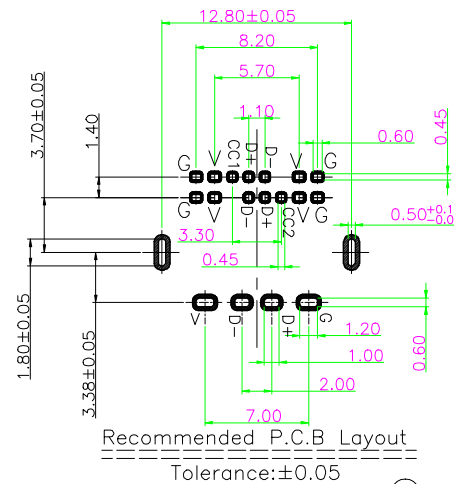
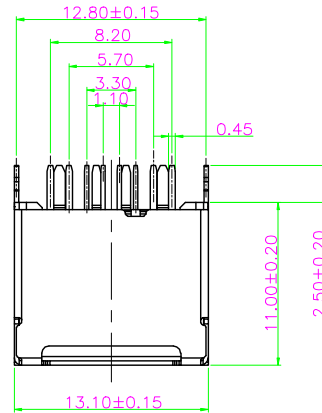





CUSTOMER DRAWING

专利产品
仿冒必究NOTE :
UT02FD018SX0XZAShell material
01: COPPER ALLOY
02: STEEL

1. Selective Plating
S1: 5u" Gold In Contact Area
100u" Tin In Tail Area
S2: 0.8u" Gold In Contact Area
100u" Tin In Tail Area
S3: 10u" Gold In Contact Area
100u" Tin In Tail Area
S4: 15u" Gold In Contact Area
100u" Tin In Tail Area
S5: 30u" Gold In Contact Area
100u" Tin In Tail Area

1. CURRENT RATING:
a: TYPE-C: 8.0A MAX
b: USB2.0: 5.0A MAX
2. Withstanding Voltage: 100V AC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS
6. INSERTION FORCE: 5N~20N
7. UNMATING FORCE: 8N~20N (1~1000次)
6N~20N (10000次之后)
8. DURABILITY: 10,000 CYCLES

7	TYPE C MD	HIGH TEMP	BLACK	UL 94V-0
6	CENTER PIECE	STAINLESS STEEL	—	NO Plated
5	TYPE C TERMINAL	COPPER ALLOY	—	Gold Plated
4	CLIP	SEE NOTE	—	Ni Plated
3	USB TERMINAL	COPPER ALLOY	—	Gold Plated
2	SHELL	SEE NOTE	—	Ni Plated
1	HOUSING	HIGH TEMP	BLACK	UL 94V-0
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

深圳市虹康科技有限公司

						30~	±0.50		
						10~ 30	±0.30		
						~ 10	±0.15		
						ANGLES	±2'		
ECN (DCN) NO.	REV.	NEW	DATE	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED			

DRAW
DESIGN
CHECK
APPRO.

PART NO.	UT02FD018SX0XZA			
DRAW NAME	TYPE C母座14PIN与USB 2.0母单面插二合一			
DRAW NO.	SHK-31010			REV. PA
UNIT	mm	SCALE	1:1	PAGE 1of1
VIEW				