
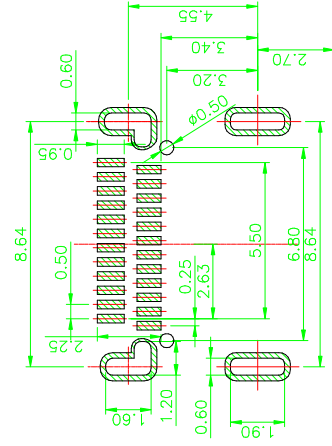
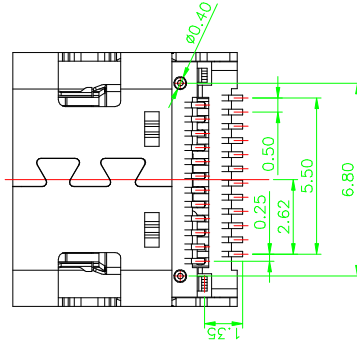
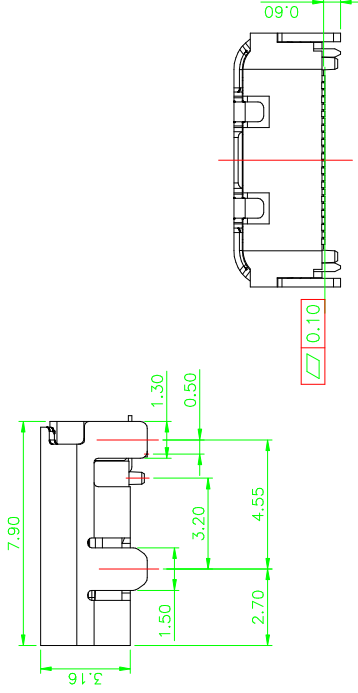
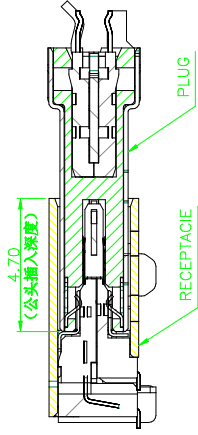

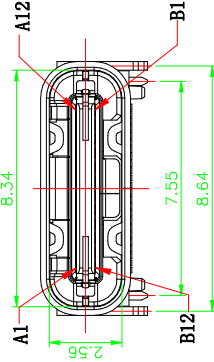


# 客户图


REV	LTR	DESCRIPTION	DATE	APPROVED
A0			20141125	LTY



RECOMMENDED P.C.B. LAYOUT  
TOLERANCE UNSPECIFIED  $\pm 0.05\text{mm}$

## 备注:

1. 材质:
  - 1.1 胶芯: LCP+30%G.F UL94V-0 黑胶
  - 1.2 端子: C5210, 镍底, 镀金
  - 1.3 外壳: 不锈钢, 表面镀镍
  - 1.4 卡钩: 不锈钢, 表面镀镍
  - 1.5 弹片: 不锈钢,
2. 主要特性:
  - 2.1 额定电流: 5A
  - 2.2 接触阻抗: 30mΩ MAX
  - 2.3 绝缘阻抗: 100MΩ MIN 250V DC
  - 2.4 耐压测试: 250V AC
  - 2.5 沾锡性: 温度 $250 \pm 5^\circ\text{C}$ , 时间 $5 \pm 0.5\text{s}$
  - 2.6 整体插入力: 3.57kgf MAX  
整体拔出力: 1.02kgf MIN  
耐久: 10000次



TOLERANCES .X $\pm 0.15$ .XX $\pm 0.10$ .XXX $\pm 0.05$ ANGLES $\pm 2.00^\circ$	TITLE: USB 3.1 Type-C母座插板双SMT 24P
APPD:	PART NO.: SHK-31263
CHECK:	DRAWING NO.:
DRAWN: LTY	REV.: A/0
UNIT: M M	SCALE: 1 : 1
SHEET: 1 / 1	

深圳市虹康科技有限公司

00607676