
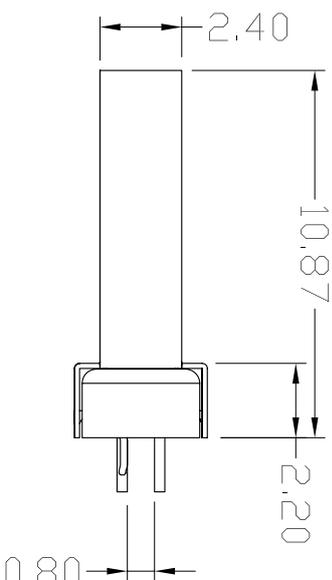
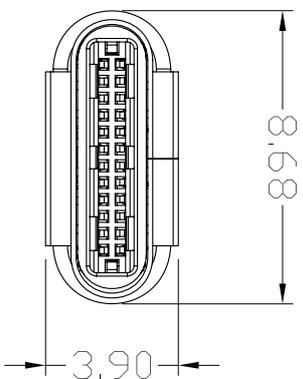
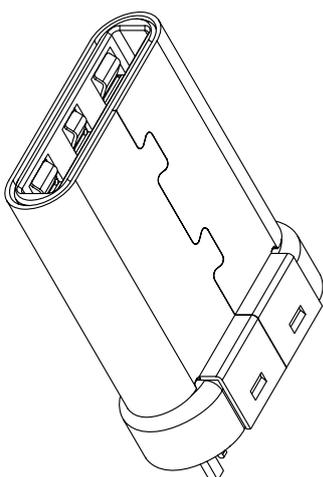


# 客户图

| REV | LTR | DESCRIPTION | DATE     | APPROVED |
|-----|-----|-------------|----------|----------|
| A0  |     |             | 20150112 | LTY      |

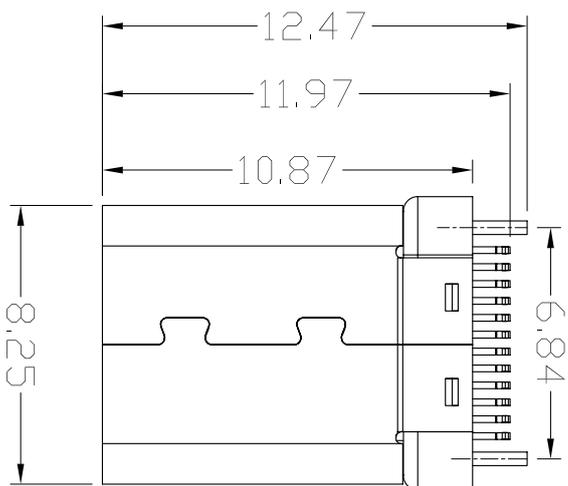

- 备注:
1. 材质:
    - 1.1 胶芯: LCP+30%G.F UL94V-0
    - 1.2 端子: C5191, T=0.20mm; 镀半金锡
    - 1.3 外壳: 不锈钢, T=0.15mm; 表面镀锌
    - 1.4 卡钩: 不锈钢, T=0.30mm; 表面镀锌
    - 1.5 弹片: 不锈钢, T=0.10mm
  2. 主要特性:
    - 2.1 额定电流: 3A
    - 2.2 接触阻抗: 30mΩ MAX
    - 2.3 绝缘阻抗: 100MΩ MIN 250V DC
    - 2.4 耐压测试: 250V AC
    - 2.5 沾锡性: 温度250±5℃
    - 2.6 整体插入力: 3.57kgf MAX  
整体拔出力: 1.02kgf MIN
    - 2.7 使用寿命: 10000次
    - 2.8 工作温度: -30℃~+80℃

深圳市虹康科技有限公司



| TOLERANCES    |
|---------------|
| .X ±0.30      |
| .XX ±0.20     |
| .XXX ±0.10    |
| ANGLES ±2.00° |

TITLE: USB A/M 3.1 Type-C 铆合式焊杯短弯端

APPD.:  
CHECK:  
DRAWN: LTY  
PART NO.: SHK-31026  
DRAWING NO.:

| REV. | SIZE: | UNIT: | SCALE: | SHEET: |
|------|-------|-------|--------|--------|
| A/0  | A4    | MM    | 1:1    | 1/1    |