

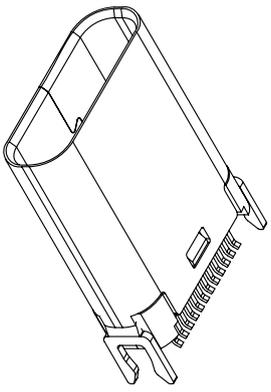
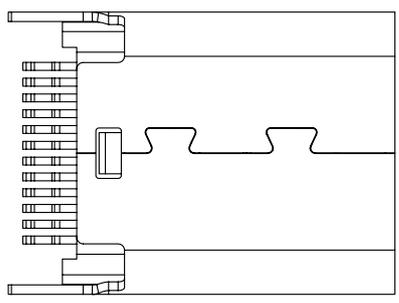
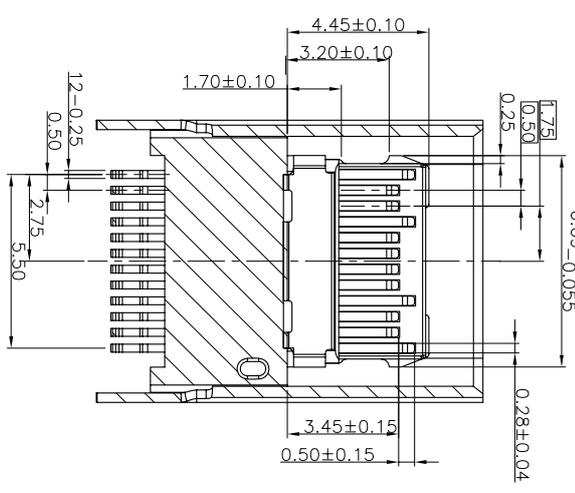
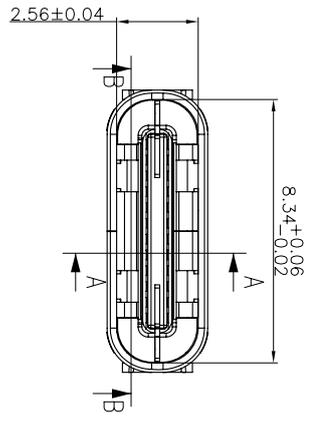


REV	LTR	DESCRIPTION	DATE	APPROVED
A0				

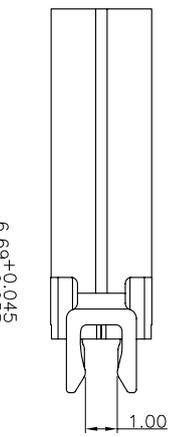

- NOTES:
- MATERIAL:
MOLDING: LCP UL94 V-0
CONTACT: COPPER ALLOY.
GOLD PLATED 30u" Min ON CONTACT AREA, 100u" Min TIN (LEAD FREE) ON SOLDER AREA, 50u" NICKEL PLATING OVER ALL.
 - MECHANICAL:
INSERTION: 5~20N.
EXTRACTION: 8~20N.
DURABILITY: 10000 CYCLES
 - ELECTRICAL:
CURRENT: 5A MIN FOR VBUS;
0.25A MIN FOR OTHER.
VOLTAGE: 5VAC MAX
WITHSTANDING VOLTAGE: 100V AC.
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.
 - ENVIRONMENTAL
TEMPERATURE RANGE -55°C ~ +85°C

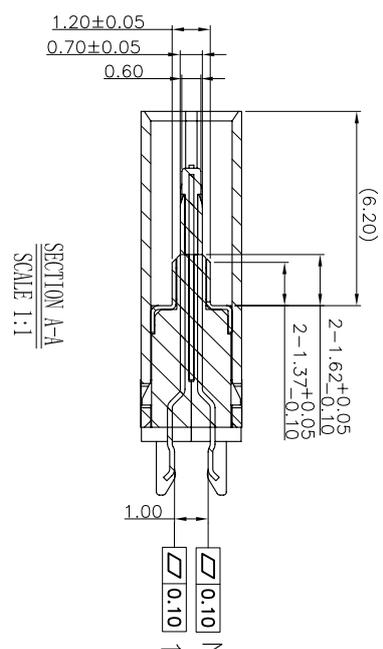

深圳市虹康科技有限公司

TITLE: USB 3.1Type-C/F 180夹板1.0 长10.50母座成品

PART NO.: SHK-31015D

DRAWING NO.: 036-00*

TOLERANCES		DRAWING NO.: 036-00*			
.X	±0.30	DRAWN:	LTY	REV:	A/0
.XX	±0.20	CHECK:		SIZE:	A4
.XXX	±0.10	APPD.:		UNIT:	MM
ANGLES	±1.00°			SCALE:	1:1
				SHEET:	1/1