




建议密封方式

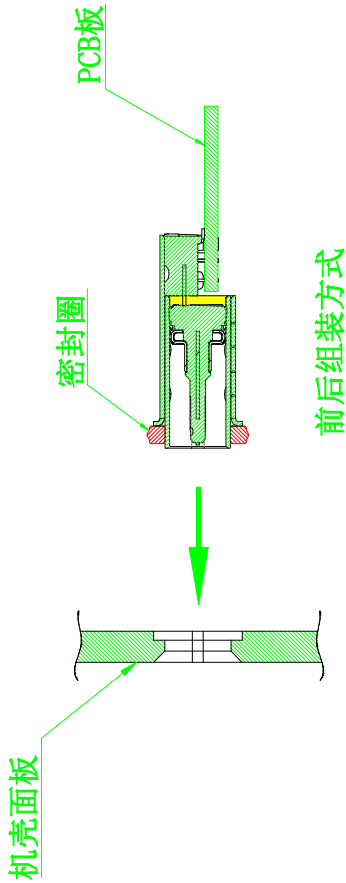

前后组装方式

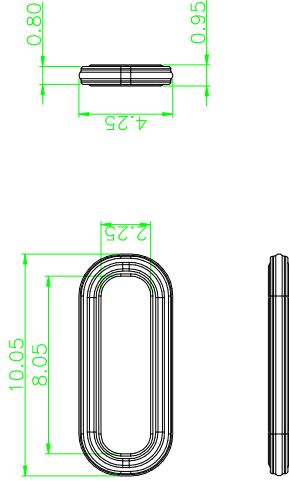

建议防水圈规格 (材质硅橡胶)

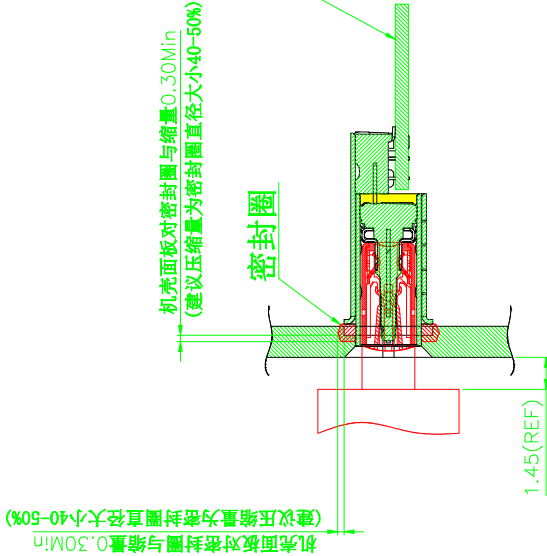


机壳面板对密封圈与缩量0.30Min
(建议压缩量为密封圈直径大小40-50%)


密封圈

PCB板

1.45(REF)

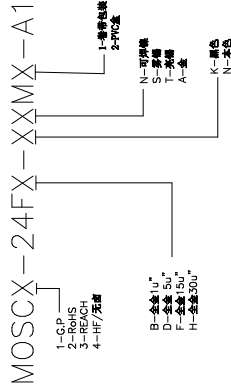

MOSC X-24FX-XXMX-A1

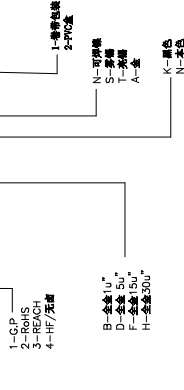

组装面板后公母头对插示意图

JH2017-048		X1	随工程图上升板次		2017.06.05	Ben	2017.06.05
20161107001		X	NEW DRAWING		2017.02.25	Ben	2017.06.05
ECN NO.		REV.	DESCRIPTION		DATE	CHANGE	2017.06.05
UNLESS OTHERWISE, GENERAL TOLERANCE:		X.xxx ±0.10		X.xx ±0.20		X.x ±0.30	
X. ±0.38		ANGULAR:		X. ±1°		X. ±3°	
X. ±5°		THIRD ANGLE PROJECTION		UNIT: mm		SCALE: 1:1	
SHEET: 2/2		SIZE: A4		DRAW NO.: 110306016		SC A1 Series	
TITLE: USB 3.1 OF WA		CL=0.30 沉板1.40mm DIP TYPE		客户图		-31030	
深圳市虹康科技有限公司		客户图		客户图		客户图	

