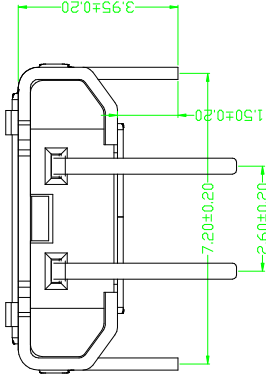
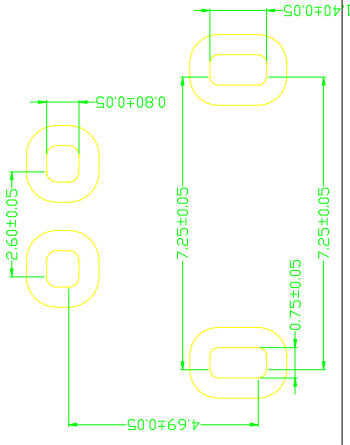
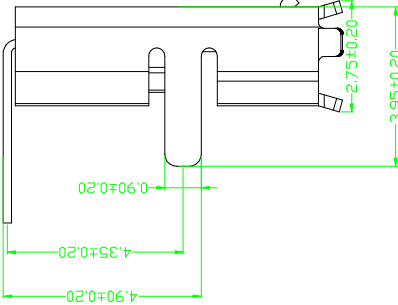
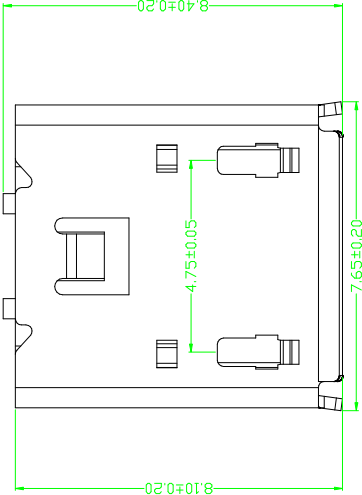



修改序号		修改说明		签名	日期		
A/0							
1	2	3	4	5	6	7	8
A							
B							
PCB LAYOUT							
C							
D							
备注:							
1. 产品规格:							
1-1. 插入力:35N MAX.							
1-2. 拔出力:10N MIN. INITIAL 8-20N AFTER 3000 CYCLES							
1-3. 额定电流:1.0A							
1-4. 额定电压:30V							
1-5. 耐久性:3000 CYCLES MIN.							
1-6. 耐电压:100V AC MIN.							
1-7. 接点阻抗:30mΩ MAX. INITIAL:40mΩ MAX AFTER 3000 CYCLES							
1-8. 绝缘电阻:100MΩ MIN							
1-9. 工作温度:-30° TO +80°							
2. 材质:							
2.1 胶芯: LCP UL94V-0							
2.2 端子: C2680R-H, 镀底, GOLD							
2.3 外壳: SPCCorSUS, 表面镀镍60-100 μ							
3. 所用材质须符合RoHS要求							
4. 重点尺寸标识"▲"符号							
E							
深圳市虹康科技有限公司							
F	尺寸		允许公差		图纸名称:		
	X.		±0.50		图 纸 类 型		
	.X		±0.20		产品工程图		
	.XX		±0.10		MICRO USB B TYPE 5P/F DIP7.15(1.5*0.9) 2P插板		
	.XXX		±0.03				
角度		±1.00°					
				2011.07.21		产品料号	
						SHK-20041	
				视 图		版号: A/0	