
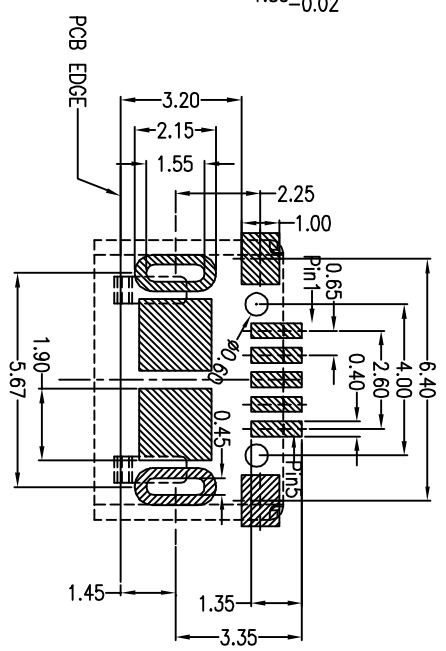
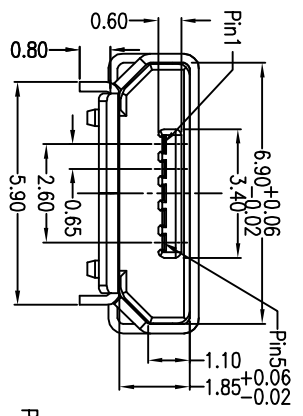
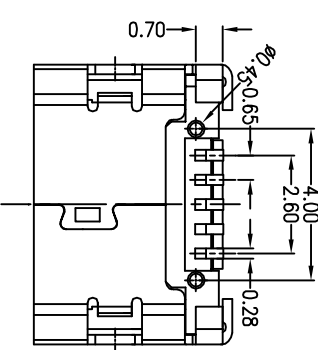
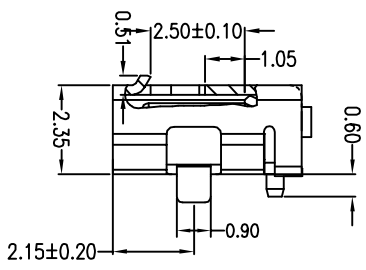
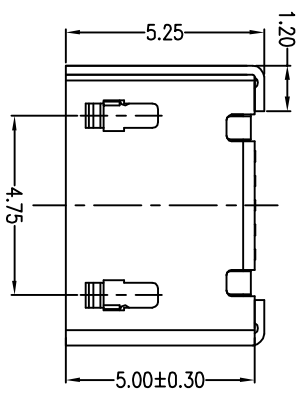



| REV. | ECH NO | LOCATIONS | DESCRIPTION | DATE |
|------|--------|-----------|-------------|------|
| | | | | |

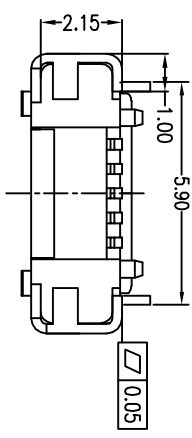

RECOMMENDED PCB LAYOUT


- Note:
1. Material:
- 1.1 Housing: High temperature thermoplastic with g.f.IJL94V-0
 - 1.2 Contact: copper alloy,t=0.20mm
 - 1.3 Shell: copper alloy,t=0.25mm
2. Specification:
- 2.1 Current rating: 1 A Max.
 - 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
 - 2.3 Contact resistance: 30 MΩ Max.
 - 2.4 Insulation resistance: 100 MΩ Min.
 - 2.5 Total mating force: 3.57 Kgf Max.
 - 2.6 Total unmating force: 1.0 Kgf Min.
 - 2.7 Temperature range: -30°C~80°C

A 01 S B 1 4 1 B 1-245

- ① 产品代号 A: 规格
- ② 产品系列 01: micro usb spin
- ③ 产品类型 B: B TYPE
- ④ 产品颜色 S: 黑色
- ⑤ 主体颜色 B: 黑色
- ⑥ 下板类型 1: dip (插板)
- ⑦ 端子序号 245: micro usb s b Type 245插板板板 球柱无弹
- ⑧ 端子材料 4: CS191R-EM
- ⑨ 主体材料 1: LP
- ⑩ 详细序号

| | | | |
|-----------------------|----------------|-----------|------------|
| PART NO: | A01SB141B1-245 | MATERIAL: | SEE NOTE |
| MODEL NO: | XX | FINISH: | SEE NOTE |
| UNIT: | MM | SIZE: | A4 |
| TOLERANCE UNSPECIFIED | .X | DR: | xiayouhong |
| | .XX | CHK: | |
| | .XXX | APP: | |
| | Ang | | |

| | | | |
|---------|------|---------------------------------------|------------|
| TITLE: | | Micro usb Ss B Type Smt 有弹脚插板5.9有住无导位 | |
| DWG NO: | A245 | SHK-20402 | REV: A |
| SCALE: | 5:1 | DATE: | 2012.05.21 |

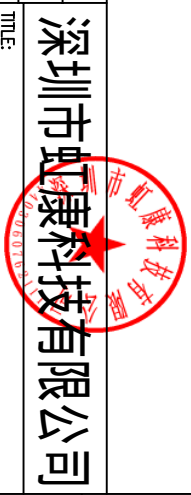

深圳市虹康科技有限公司