
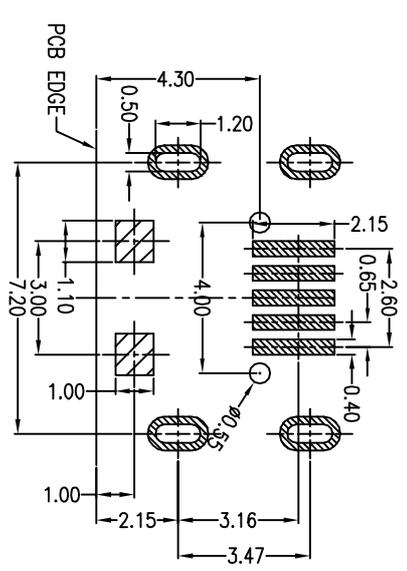
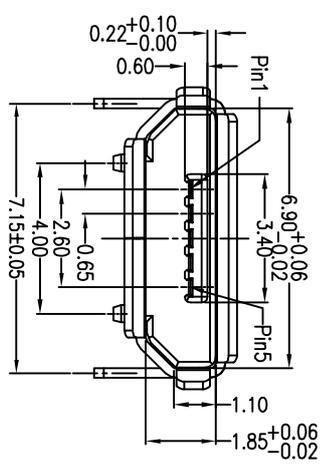
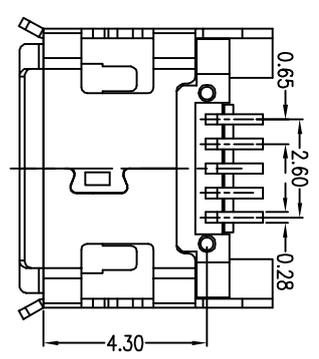
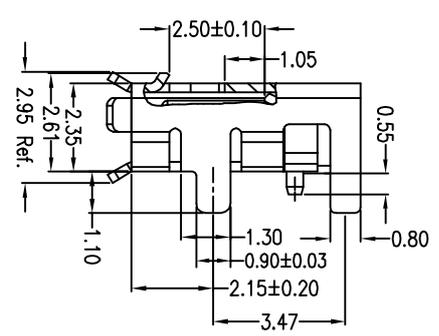
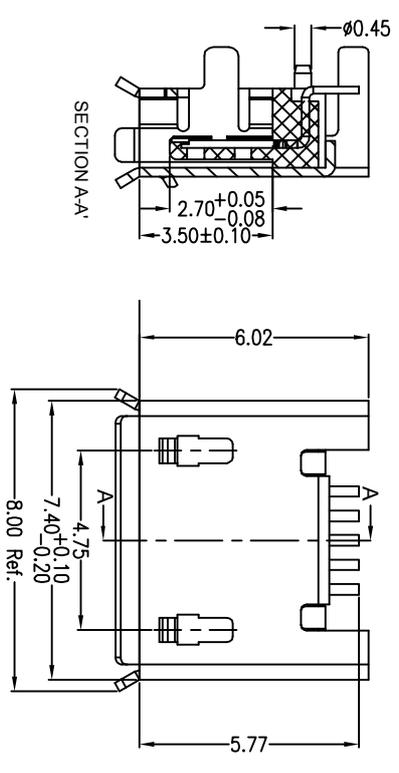


REV.	ECH NO	LOCATIONS	DESCRIPTION	DATE

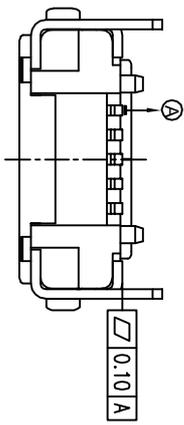

- Note:
- Material:
 - Housing: High temperature thermoplastic with g.f.U.L94V-0
 - Contact: copper alloy,t=0.20mm
 - Shell: copper alloy,t=0.25mm
- 2.Specification:
- Current rating: 1 A Max. voltage: 100 V(ac) for 1 min.
 - Dielectric withstanding
 - Contact resistance: 50 mW Max.
 - Insulation resistance: 100 MW Min.
 - Total mating force: 3.57 Kgf Max.
 - Total unmating force: 1.0 Kgf Min.0.81~2.05 Kgf Min.
 - Temperature range: -30°C~80°C

A 01 S B 1 4 1 B 1-261

- 产品代号 A: 部品
- 产品系列 01: micro usb 5pin
- 产品类别 S: 母座
- 产品类型 B: B TYPE
- 外壳材质 1: 2980R-H
- 端子材质 4: 5181R-B
- 主体材质 1: LCP
- 主体颜色 B: 黑色
- 下板类型 1: d1p (插板)
- 细节流水 20: micro usb 5pin B Type d1p 有导电柱/20脚插板/1.14脚插板/1.0脚插板

PART NO:	A01SB141B1-261	MATERIAL:	SEE NOTE
MODEL NO:	XX	FINISH:	SEE NOTE
UNIT:	MM	SIZE:	A4
TOLERANCE UNSPECIFIED	.x	DR:	夏友红
	.xx	CHK:	
	.xxx	APP:	
	Ang.	SCALE:	5:1
		DATE:	2013.04.16
TITLE:		DWG NO:	SHK-20043
Micro:usb 5P/F B Type d1p 有导电柱7.2 加导电柱加长0.75脚长1.14脚插板		REV:	A

深圳市顺宏康科技有限公司

1 2 3 4 5 6 7 8