
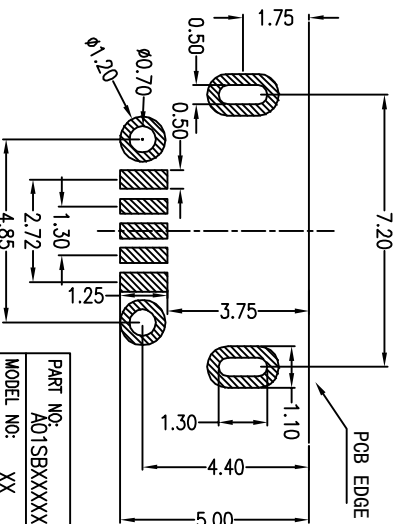



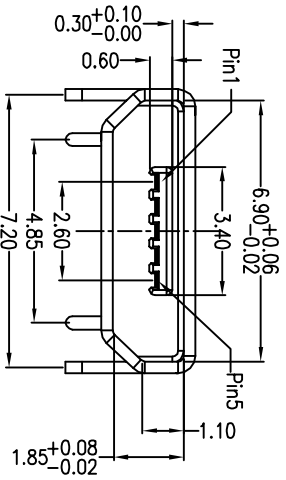


REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE
------	---------	-----------	-------------	------

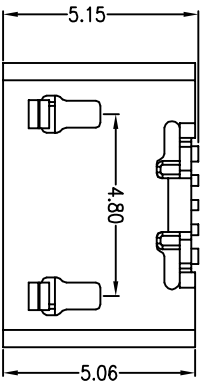

PCB图只做参考

Note:
1. Material:

- Housing: High temperature thermoplastic with g.f.U.L94V-0
- Contact: copper alloy,t=0.15mm
- Shell: copper alloy,t=0.30mm

2. Specification:

- Current rating:1.5PIN 3A Max/2,3,4PIN 1A Max.
- Dielectric withstanding voltage: 100 V(ac) for 1 min.
- Contact resistance: 30 mΩ Max.
- Insulation resistance: 100 MΩ Min.
- Total mating force: 3.57 Kgf Max.
- Total unmating force: 1.0 Kgf Min.
- Temperature range: -30°C~80°C

PART NO.	A01SBXXXXXXX-505	MATERIAL	SEE NOTE
MODEL NO.	XX	FINISH	SEE NOTE
UNIT:	MM	COLOR:	SEE NOTE
SIZE:	A4	DR:	xiaoyouhong
TOLERANCE UNSPECIFIED	.X	CHK:	
	.xx	APP:	
	.xxx		
	.xxx		
	Ang		

TITLE: 深圳市虹康科技有限公司

MIRCO USB S5 B TYPE 四脚全插牛角型短针无导线,5加宽

DWG NO: A505 SHK-20402

SCALE: 5:1

DATE: 2015.01.08

REV: A

DR:	xiaoyouhong
CHK:	
APP:	

A 01 S B X X X X X X X X X X XX-505

① 外壳材质 1:CB98R-H
② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪

①:1:500u' ②:1:500u' ③:1:500u' (脚)
④:1:500u'

端子电镀 01:1:500u' ;02:1:500u' ;03:1:500u'
05:1:500u' ;10:1:500u' ;15:1:500u' ;30:1:500u'

主体颜色 B:黑色

主体材质 1:LP

端子材质 4:0519IR-H

F

E

D

C

B

A