
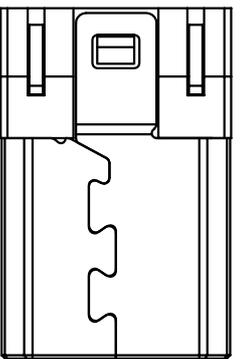
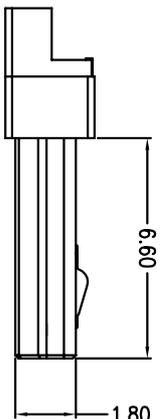

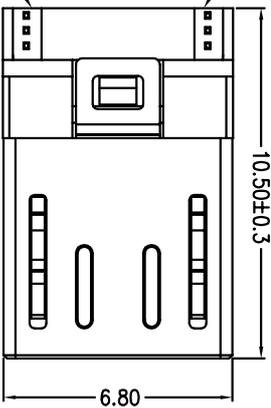



项目 MARX	变更类容 MODIFICATION	日期 DATE	修改人 DRAW	核准 APPROVE



NOTES:  
 1.MECHANICAL:  
 INSERTION FORCE: 35N MAX.  
 EXTRACTION FORCE:10N MIN(INITIAL),8~20N(AFTER)  
 DURABILITY: 10000 CYCLES MIN.  
 2.ELECTRICAL:  
 CURRENT: 1AMIN WITH PIN2,3,4;1.8A MIN WITH PIN1 & 5  
 VOLTAGE: 30V MAX  
 WITHSTANDING VOLTAGE: 100V AC  
 CONTACT RESISTANCE: 30 m<sup>2</sup> MAX  
 INSULATION RESISTANCE: 100M<sup>2</sup> MIN  
 3.ENVIRONMENTAL  
 TEMPERATURE RANGE: -30°C ~ +80°C

# 成品图 深圳市虹康科技有限公司

4	Molding	1	LCP
3	Shell	1	Nickel
2	Contact	5	Au plated
1	Housing	1	LCP

TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X±0.30	X±.8°
.XX±0.10	.X±1.0°
.XXX±0.05	

单位	mm	材料	设计	料号	SHK-20246
日期		料厚	审核	品名	塑料1000 50#导线式 3短路
比例		料宽	核准	型号	
张数		行程	备注	角法	
SHEET		PITCH	REMARK	REV.	T3

