

规格说明: Specifications:

电气特性:Electrical:


1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:





1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf (MAX)
Unmate force: 1.02kgf (MIN)
2. 端子保持力: Terminal Retention
1.2kgf (MIN)

原材料:Material:


1. 塑胶:Housing:
Hing Temperature Thermoplastics,
U1 94V-0 PBT White/Black
2. 端子>Contact:Copper Alloy C2680
3. 外壳:Shell: Copper Alloy C2680/SPCC
- 电镀:Finish:
1. 端子>Contact: Plated Gold in Mating Area;
Tin On Solder Tails
2. 外壳:Shell:
Nickel Plating



SECTION A-A

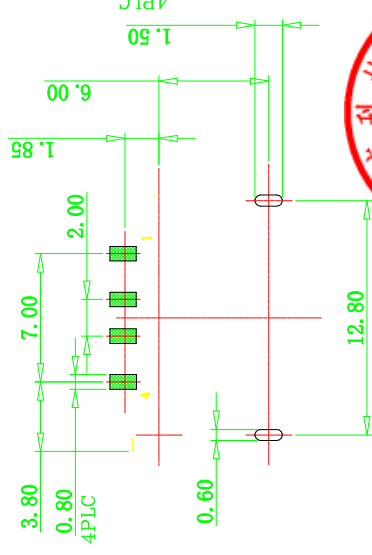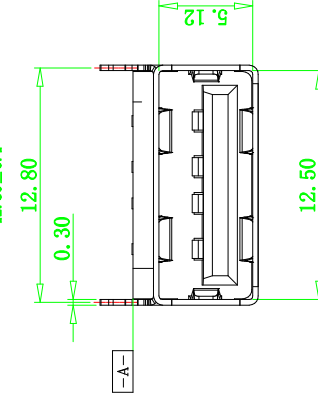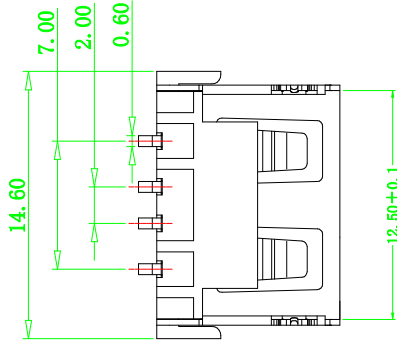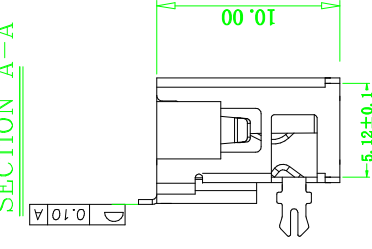

RECOMMENDED PCB LAYOUT
THICKNESS=1.0mm (TOLERANCES ± 0.05)



深圳市虹康科技有限公司

品名 (ITEM NO)		A/F 短体10.0 SMT铜壳 (两脚无卷边H=6.8)		图号 (DWG NO) 版本 (REV) 日期 (DATE) 设计 (DESIGN) 审核 (CHECKED) 核准 (APPROVED)		单位(UNIT): MM	
料号 (PART NO)		SHK-20097				比例(SCALE) 1:1	
模号 (MODEL NO)		A008-1I-3				公差 (TOLERANCE) UNSPECIFIED	
						X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 X° ±5° X.X° ±2°	
				未注公差		公差 (TOLERANCE) UNSPECIFIED	
				公差 (TOLERANCE) UNSPECIFIED		公差 (TOLERANCE) UNSPECIFIED	