
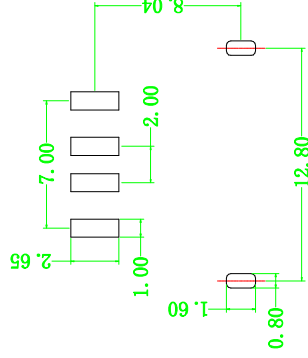



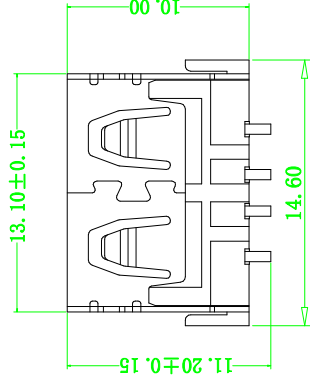


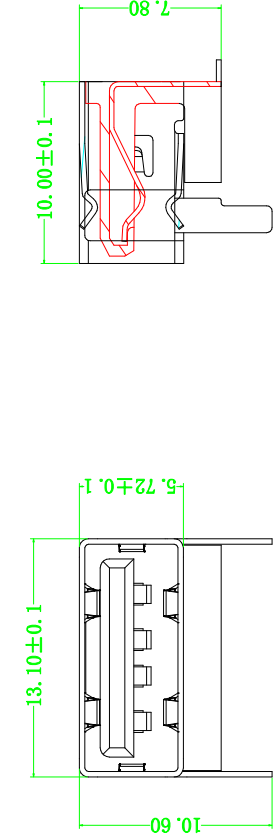

P.C.B LAYOUT

规格说明:Specifications:

电气特性:Electrical:

- 额定电流: Current Rating
1.5A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触阻抗:Contact Resistance
30 milliohms MAX
- 耐电压:Dielectric Withstanding Voitage:
500 V AC AT Sea Levol
- 绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

- 插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)
- 端子保持力: Terminal Retention
1.2kgf(MIN)

原材料:Matorial:

- 塑胶:Housing:
Hing Temperature Thermaplastics,
U1 94V-0 PBT White/Black
- 端子>Contact:Copper Alloy C2680
- 外壳:Shell: Copper Alloy C2680/SPCC
电镀:Finish:
1.端子>Contact: Piated Gold in Mating Area;
Tin On Solder Talls
2. 外壳:Shell:
Nickel Plating

深圳市虹康科技有限公司

A/F 短体10.0 DIP(侧脚有无边H=7.8H)

SHK-20108

A008-1J

图号 (DWG NO)	单位 (UNIT) : MM
版本 (REV)	A/0
日期 (DATE)	比例 (SCALE) 1:1
设计 (DESIGN)	
审核 (CHECKED)	未注公差 TOLERANCE UNSPECIFIED
核准 (APPROVED)	X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 X° ±5° X'° ±2°