

**规格说明: Specifications:**  
**电气特性: Electrical:**





- 1. 额定电流: Current Rating**  
 1.5A/contact terminal
- 2. 额定电压: Voltage Rating**  
 30V DC
- 3. 接触阻抗: Contact Resistance**  
 30 milliohms MAX
- 4. 耐压: Dielectric Withstanding Voltage:**  
 500 V AC AT Sea Level
- 5. 绝缘阻抗: Insulation Resistance:**  
 1000MEGA ohms MIN

**物理性能: Mechanical:**

- 1. 插拔力: Connector Mate and Unmate Force**  
 Mate force: 3.57kgf (MAX)  
 Unmate force: 1.02kgf (MIN)
- 2. 端子保持力: Terminal Retention**  
 1.2kgf (MIN)


**原材料: Material:**

- 1. 塑胶: Housing:**  
 Hing Temperature Tnermaplastics,  
 UI 94V-0 PBT White/Black
- 2. 端子: Contact: Copper Alloy C2680**
- 3. 外壳: Shell: Copper Alloy C2680/SPCC**
- 电镀: Finish:**
1. 端子: Contact: Plated Gold in Mating Area,  
 Tin On Solder Talls
2. 外壳: Shell:  
 Nickel Plating

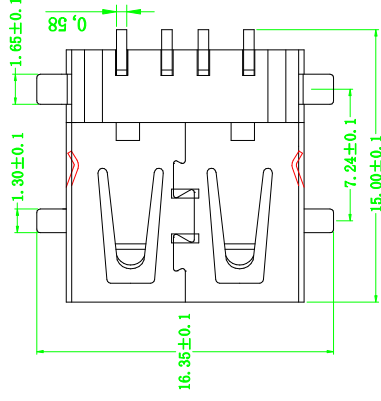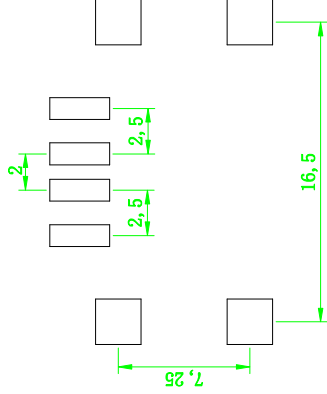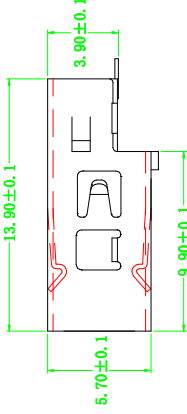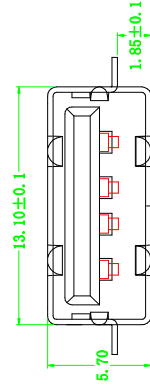

P. C. B LAYOUT

# 深圳市虹康科技有限公司



品名 (ITEM NO)	
料号 (PART NO)	SHK-20090
模号 (MODEL NO)	A008-IN-6

图号 (DWG NO)		单位 (UNIT): MM
版本 (REV)	A/0	比例 (SCALE) 1:1
日期 (DATE)		
设计 (DESIGN)		未注公差 TOLERANCE UNSPECIFIED
审核 (CHECKED)		X.X ±0.30
核准 (APPROVED)		X.XX ±0.20
		X.XXX ±0.10
		X.X° ±5°
		X.X° ±2°