

规格说明:Specifications:
电气特性:Electrical:





1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗:Contact Resistance
30 milliohms MAX
4. 耐电压:Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

1. 插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf (MAX)
Unmate force:1.02kgf (MIN)
2. 端子保持力: Terminal Retention
1.2kgf (MIN)

原材料:Matorial:

1. 塑胶:Housing:
Hing Temperature Thernmaplastics,
UI 94V-0 PBT White/Black
2. 端子>Contact:Copper Alloy C2680
3. 外壳:Shell: Copper Alloy C2680/SPCC
- 电镀:Finish:
1. 端子>Contact: Plated Gold in Mating Area;
Tin On Solder Talls
2. 外壳:Shell:
Nickel Plating

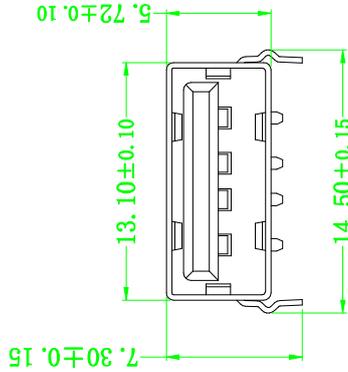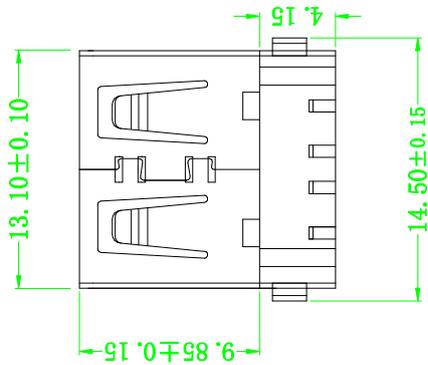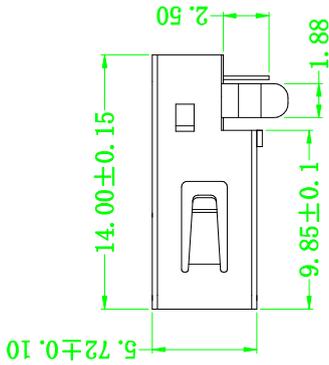

深圳市虹康科技有限公司



品名 (ITEM NO) A/F 沉板 90度弯脚平口

料号 (PART NO) SHK-2088

模号 (MODEL NO) A008-11-4

图号 (DWG NO)	单位 (UNIT): MM
版本 (REV)	比例 (SCALE) 1:1
日期 (DATE)	
设计 (DESIGN)	未注公差
审核 (CHECKED)	TOLERANCE UNSPECIFIED
核准 (APPROVED)	X.X ±0.30
	X.XX ±0.20
	X.XXX ±0.10
	X.X° ±5°
	X.X' ±2'