

REV	EC	NUMBER	DESCRIPTION	DATE

SPECIFICATIONS

1) Electrical:





- 1.1 Contact Resistance: 30 mΩ Max
- 1.2 Insulation Resistance: 1000MΩ Min
- 1.3 Withstanding Voltage: 500V DC
- 1.4 Current rating 2.0AMP Max.
- 1.5 Total Mating Force: 3.57kg Max.
- 1.6 Total Unmating force: 0.7kg Min.
- 1.7 temperature Range: -25~ +75°

2) Material:

- 2.1 Housing: High temperature Plastics UL94V-0
- 2.2 SHELL: SPCC OR BRASS
- 2.3 Contact: Brass

3) Finishing:

- 3.1 plating: Au or Sn Over 100u" Ni
- 3.2 Crimp Terminal : Gold-plating
- 3.3 Shell: Nickel-plating

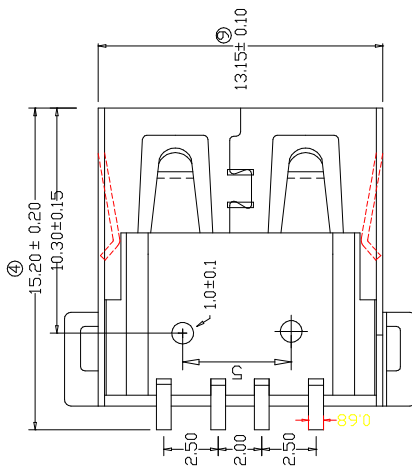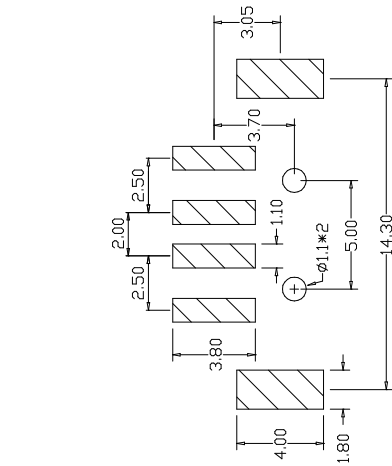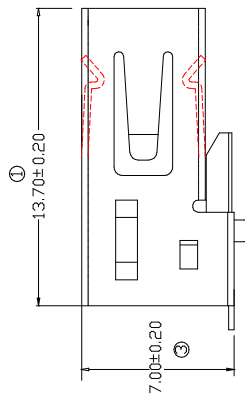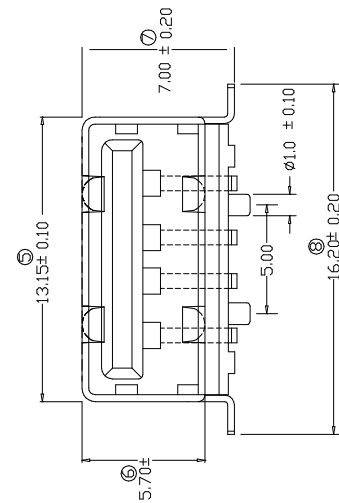

CUSTOMER DRAWING

Yane

SHK-20092

深圳市虹康科技有限公司

DATE	PR	J	SIZE	A4	REV	A
CHECKED	APP	VE	TITLE	USBAF13.6卷边无后包		
SCALE	/7.0高/大点/前贴后贴					
SHEET	1/1	料号 SHK-20092				