
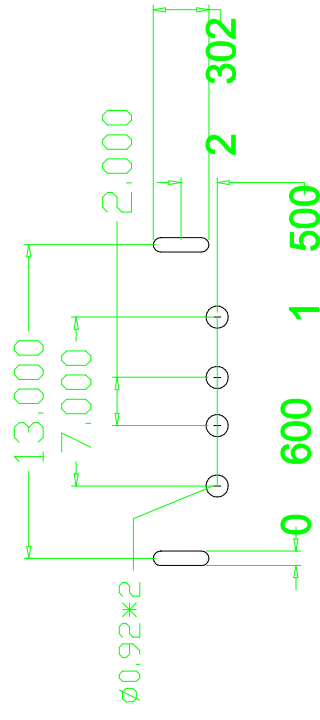
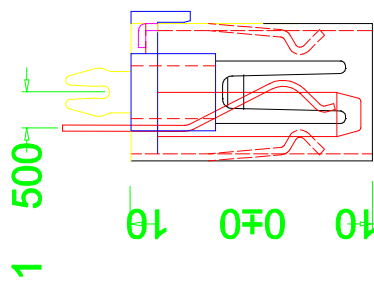


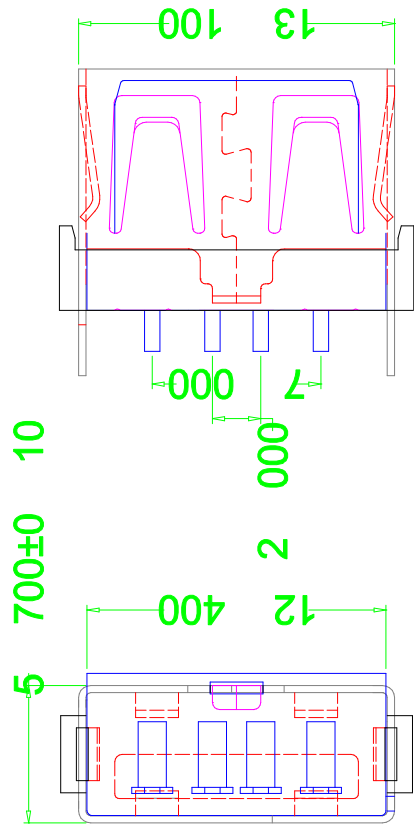

规格说明: Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf (MAX)
Unmate force: 1.02kgf (MIN)
2. 端子保持力: Terminal Retention
1.0kgf (MIN)

原材料:Material:

- ## 1. 塑胶:Housing:

2. 端子: Contact: Copper Alloy C2680

电镀:Finish:

- ## 1. 端子:Contact: Plated Gold in Mating Area; Tin On Solder Tails

端子四周镀50U"(MIN)锡,镀金区域镀100-200U"镀金1U"

2. 外壳:Shell:
Nickel Plating
铜壳四周镀80U"(MIN)锡

成品图	MANUFACTURE DWG	公差一览表	CH	AP
		TOLERANCE UNLESS OTHERWISE		
.X $\pm$ 0.15		X. $\pm$ 5°	X $\pm$ 2°	XX $\pm$ 1°
.XX $\pm$ 0.05				
XXX $\pm$ 0.02				

深圳市虹康科技有限公司

日期	DATE	单位	制图	图号	DWG. NO.	SHK-20105
审核	CHECKED	比例	1:1	设计	DESIGN NAME	10.0A 母外壳
核准	APPROVE	角法		版本	VER	页数 PG1
校核	CHECKED	视图		版本	VER	页数 PG1
校核	CHECKED	视图		版本	VER	页数 PG1
校核	CHECKED	视图		版本	VER	页数 PG1
校核	CHECKED	视图		版本	VER	页数 PG1
校核	CHECKED	视图		版本	VER	页数 PG1
校核	CHECKED	视图		版本	VER	页数 PG1
校核	CHECKED	视图		版本	VER	页数 PG1
校核	CHECKED	视图		版本	VER	页数 PG1
校核	CHECKED	视图		版本	VER	页数 PG1
校核	CHECKED	视图		版本	VER	页数 PG1
校核	CHECKED	视图		版本	VER	页数 PG1
校核	CHECKED	视图		版本	VER	页数 PG1
校核	CHECKED	视图		版本	VER	页数 PG1