

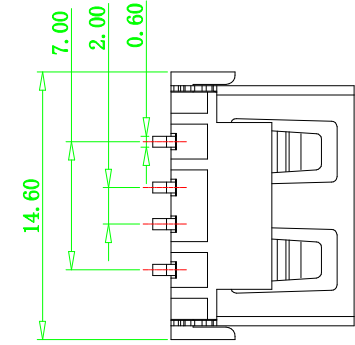


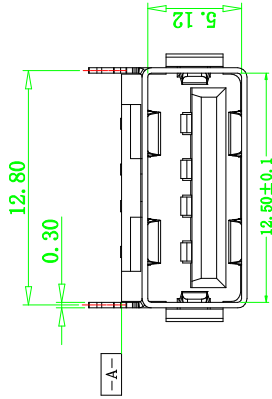


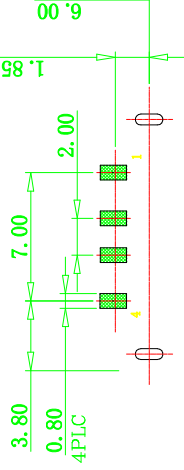

SECTION A-A



规格说明:Specifications:

电气特性:Electrical:

- 额定电流: Current Rating
1.5A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触阻抗: Contact Resistance
30 milliohms MAX
- 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

- 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf (MAX)
Unmate force: 1.02kgf (MIN)
- 端子保持力: Terminal Retention
1.2kgf (MIN)

原材料: Material:

- 塑胶: Housing:
Hing Temperature Thermoplastics,
UL 94V-0 PBT White/Black
 - 端子: Contact: Copper Alloy C2680
 - 外壳: Shell: Copper Alloy C2680/SPCC
- 电镀: Finish:
- 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails
 - 外壳: Shell:
Nickel Plating

RECOMMENDED PCB LAYOUT

THICKNESS=1.0mm (TOLERANCES ±0.05)

深圳市虹康科技有限公司

A/F 短体10.0 SMT铜壳(后两脚无卷边H=6.8)

品名 (ITEM NO)

料号 (PART NO)

模号 (MODEL NO)

SHK-20095

A008-1N-3

图号 (DWG NO)		单位 (UNIT): MM
版本 (REV)	A/0	比例 (SCALE) 1:1
日期 (DATE)		
设计 (DESIGN)		
审核 (CHECKED)		
核准 (APPROVED)		

公差	未注公差
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
X°	±5°
X'°	±2°