
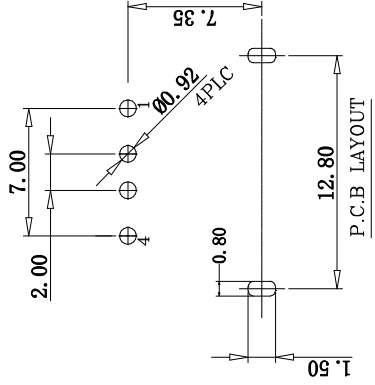





SECTION A-A



规格说明:Specifications:  
电气特性:Electrical:

- 额定电流: Current Rating  
1.5A/contact terminal
- 额定电压: Voltage Rating  
30V DC
- 接触阻抗:Contact Resistance  
30 milliohms MAX
- 耐电压:Dielectric Withstanding Voitage:  
500 V AC AT Sea Level
- 绝缘阻抗:Insulation Resistance:  
1000MEGA ohms MIN

物理性能:Mechanical:

- 插拔力: Cnnector Mate and Unmate Force  
Mate force:3.57kgf (MAX)  
Unmate force:1.02kgf (MIN)
- 端子保持力: Terminal Retention  
1.2kgf (MIN)

原材料:Matorial:

- 塑胶:Housing:  
Hing Temperature Thermaplastics,  
UI 94V-0 PBT White/Black
  - 端子>Contact:Copper Alloy C2680
  - 外壳:Shell: Copper Alloy C2680/SPCC
- 电镀:Finish:  
1.端子>Contact: Piated Gold in Mating Area;  
Tin On Solder Talls  
2.外壳:Shell:  
Nickel Plating



深圳市虹康科技有限公司

|               |                              |               |     |                               |
|---------------|------------------------------|---------------|-----|-------------------------------|
| 品名 (ITEM NO)  | A/F 短体10.60 DIP (两脚无卷边H=6.5) | 图号 (DWG NO)   |     | 单位 (UNIT): MM                 |
| 料号 (PART NO)  | SHK-20096                    | 版本 (REV)      | A/0 | 比例 (SCALE) 1:1                |
| 型号 (MODEL NO) | A008-11-2                    | 日期 (DATE)     |     |                               |
|               |                              | 设计 (DESIGN)   |     | 未注公差<br>TOLERANCE UNSPECIFIED |
|               |                              | 审核 (CHECKED)  |     | X.X ±0.30                     |
|               |                              | 核准 (APPROVED) |     | X.XX ±0.20                    |
|               |                              |               |     | X.XXX ±0.10                   |
|               |                              |               |     | X.X° ±5°                      |
|               |                              |               |     | X.X° ±2°                      |