
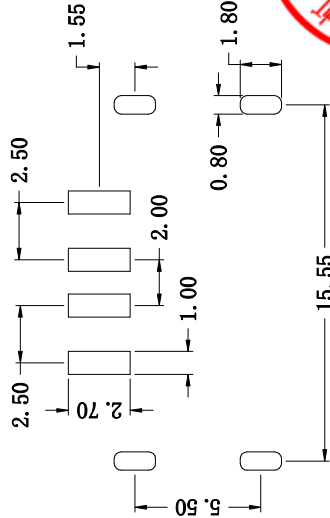
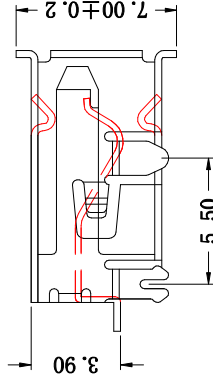
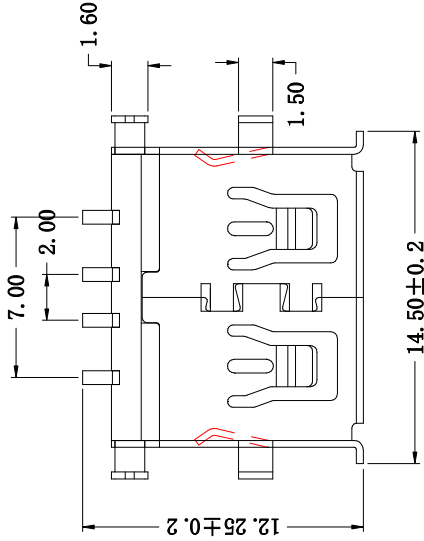
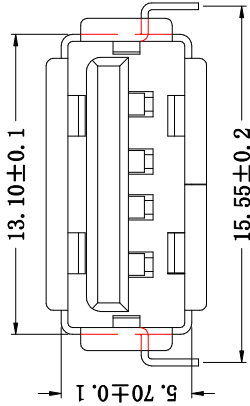


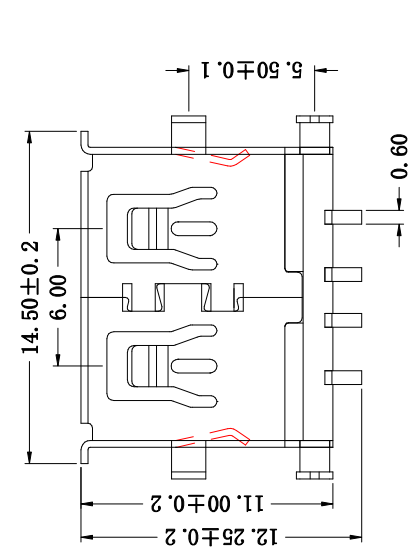

规格说明:Specifications:

电气特性:Electrical:

- 额定电流: Current Rating
1.5A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触阻抗:Contact Resistance
30 milliohms MAX
- 耐电压:Dielectnic Withstanding Voitage:
500 V AC AT Sea Level
- 绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

- 插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf (MAX)
Umate force:1.02kgf (MIN)
- 端子保持力: Terminal Retention
1.2kgf (MIN)

原材料:Matorial:

- 塑胶:Housing:
Hing Temperature Thermaplastics,
UL 94V-0 PBT White/Black
- 端子:Contact:Copper Alloy C2680
- 外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:

- 端子:Contact: Piated Gold in Mating Area;
Tin On Solder Talls
- 外壳:Shell:
Nickel Plating



深圳市虹康科技有限公司

品名 (ITEM NO)	A/F 短体沉板1.9四脚卷边SMT	图号 (DWG NO)		单位 (UNIT): MM
料号 (PART NO)	SHK-20086	版本 (REV)	A/0	比例 (SCALE) 1:1
模号 (MODEL NO)	A011-ID-1	日期 (DATE)	2014.03.20	
		设计 (DESIGN)		公差 (TOLERANCE)
		审核 (CHECKED)		未注公差 (UNSPECIFIED)
		核准 (APPROVED)		X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 X° ±5° X.X° ±2°