文件类型:	产品图面

REV.	ECN NO.	DESCRIPTION	DRWN	APPD.	DATE.

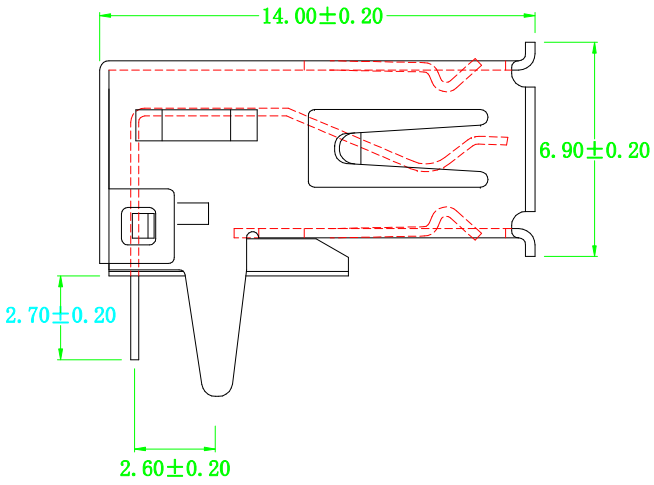

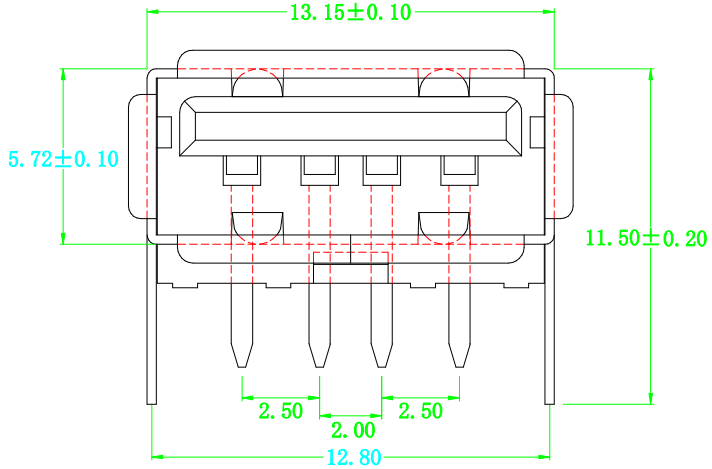

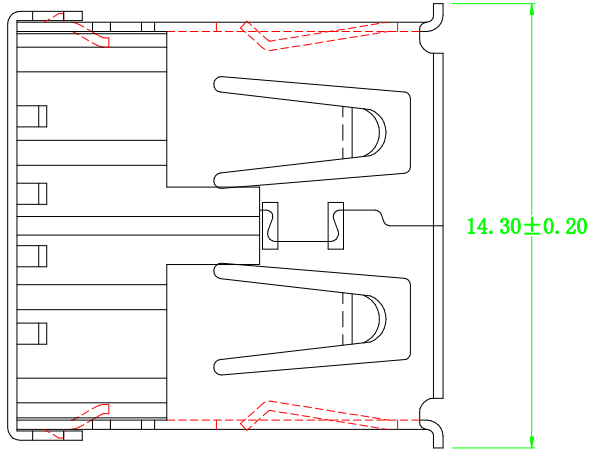

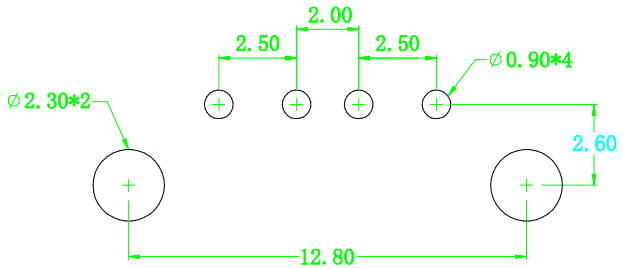

Specifications:
Electrical:
1. Current Rating
1.5A/contact terminal
2. Voltage Rating
30V DC
3. Contact Resistance
30 milliohms MAX
4. Dielectnic Withstanding Voitage:
500 V AC AT Sea Levol
5. Lnsulation Resistance:
1000MEGA ohms MIN
Mechanical:
1. Cnnector Mate and Unmate Force
Mate force:3.75kgf(MAX)
Unmate force:1.02kgf(MIN)
2. Terminal Retenion
1.2kgf(MIN)
Matorial:
1. Housing:
Hing Temperature Tnermaplastics,
Ul 94V-0 PBT/LCP White/Black
2. Contact:Copper Alloy C2680
3. Shell: Copper Alloy C2680/SPCC
Finish:
1. Contact: Piated Gold in Mating Area;
Tin On Solder Talls
2. Shell:
Nickel Plating

UNITS	SCALE
MM	1:1

GENERAL TOLERANCE

X.	±0.30
X.X	±0.20
X.XX	±0.10
X.°	±3°
X.X°	±2°

深圳市虹康科技有限公司

DR. Aaron	TITLE: USB A/F 90° DIP(加盖直脚)		
CHK. Aaron	MAT'L:	DWG NO: SHK-20080	
APPD. PANYUFENG	DATE: 2011.06.28	P	PART NO: SIZE A4