

SPECIFICATION:

Current Rating: 5 Amperes

Dielectric Strength: 500V(RMS)

Resistance: 1000 Ohms Minimum

Mechanical Characteristics:

Material: PBT+30%GF 94V 0

MATERIAL:

Shell: SPCC

PLATING:



Plating: Au Plated on contact area

Plating: Ni Plated on slider area

Plating: Nickel Plated over all

Operating Temperature: 45° to +85°

U 2113-B B 1 0 0 1 1 a - 25 A

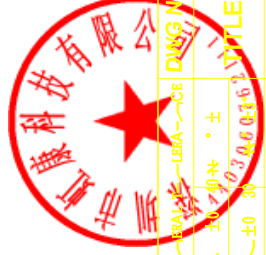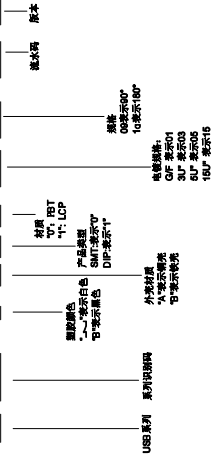

REV	ECN	DESCRIPTION	DATE	ECR
A		新版发行	2012/11/16	赵振
REV	A	SIZE	A4	1/1
DWG NO	DVG-USBAF2-064	CHECKED	赵振	UNIT
PART NO	SHK-20085	APPROVAL		SCALE
SHEET	±0°/±0.05°	DATE	2012/11/16	UNIT
SIZE	±0.30			
PLATE	±0.30			
PLATE	±0.30			
PLATE	±0.30			

深圳市虹康科技有限公司