



1. 插拔力: Connector Mate and Unmate Force

Mate force:3.57kgf(MAX)

Unmate force:1.02kgf(MIN)

2. 端子保持力: Terminal Retention

1.0kgf(MIN)

原材料: Matorial:

1. 塑胶:Housing:

Hing Temperature Thermoplastics,

2. 端子: Copper Alloy C2680

3.外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:

1. 端子: Contact: Plated Gold in Mating Area;


Tin On Solder Tails

端子四周镀50U”(MIN)锡,镀金区域镀100—200U”镀金1U”

2.外壳:Shell:

銅壳四周鍍80U”(MIN)鍍

Nickel Plating

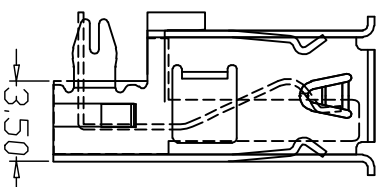

Prova

深圳市虹康科技有限公司