

?	?	?	?	?	?	?	?
Max	Modification	Date	Draw	Approve			
A							

规格说明:Specifications:

电气特性:Electrical:

- 额定电流: Current Rating
1.5A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触电阻: Contact Resistance
30 milliohms MAX
- 耐压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 绝缘电阻: Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

- 插拔力: Connector Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)
- 端子保持力: Terminal Retention
1.0kgf(MIN)


原材料:Material:

- 塑胶: Housing:
Hing Temperature Ternmaplastics,

电镀:Finish:

- 端子: Contact: Plated Gold in Mating Area:
Tin On Solder Tails
- 端子四周镀50U"(MIN)锡,镀金区域镀100-200U"镀金1U"
- 外壳: Shell:
铜壳四周镀80U"(MIN)锡

Nickel Plating

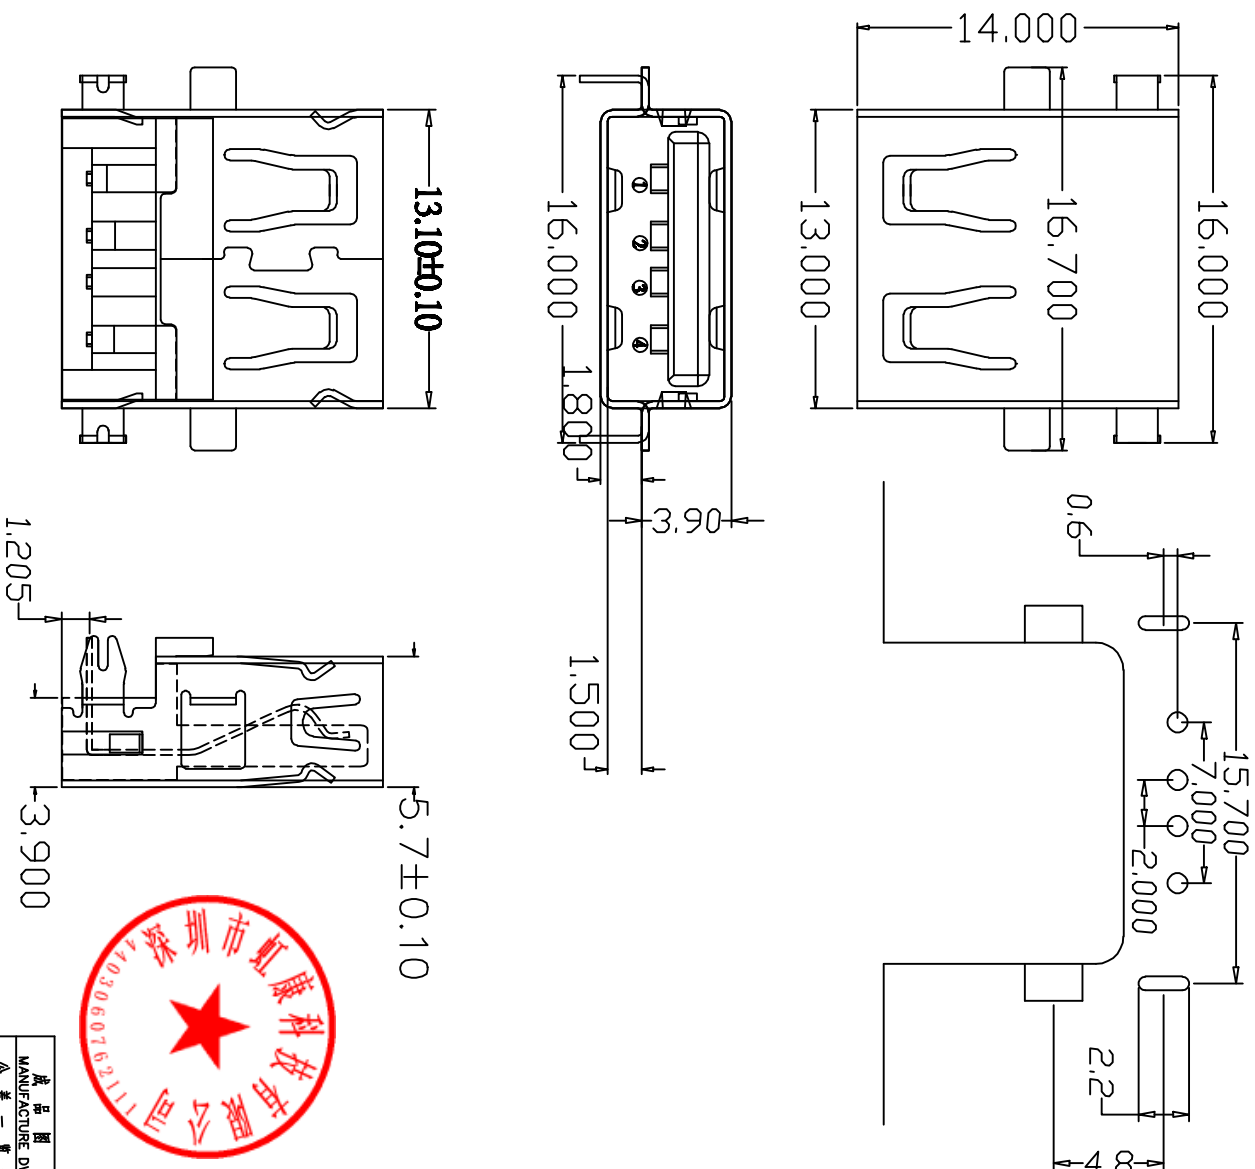

深圳市虹康科技有限公司

成品图		公差		日期		单位		制图		审核		批准		版本		页次	
MANUFACTURE DWG		TOLERANCE UNLESS OTHERWISE		DATE		UNIT		DRAWING		DESIGN		APPROVE		VER		SHEET	
.X±0.15		X±5°		?		?		MM		1:1		SHK-20100		VER		PG1	
XX±0.05		.X±2°		CHECKED		SCALE		LUFU		NAME		VER		SHEET		PG1	
XXX±0.02		.XX±1°		APPROVE		NEW		SHK-20100		VER		SHEET		PG1		PG1	