

规格说明: Specification:

电气特性: Electrical:

- 1 额定电流: Current Rating: 5A / Contact Rating
- 2 额定电压: Voltage Rating: 30V DC
- 3 接触电阻: Contact Resistance: 30 milliohms MAX
- 4 耐电压: Dielectric Withstanding Voltage: 500 V AC AT Sea Level
- 5 绝缘电阻: Insulation Resistance: 1000MEGA ohms MIN

物理性能: Mechanical:







- 1 插拔力: Contact Mating Force: 357kgf (MAX)
- 2 端子保持力: Terminal Retention Force: 102kgf (MIN)

原材料: Material:

- 1 塑胶: Housing: High Temperature Thermoplastics, UL 94V0 PBT White/Black
- 2 端子: Contact: Copper Alloy C2680
- 3 外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:


- 1 端子: Contact: Plated Gold Finger Area; Thickness: 10um
- 2 外壳: Shell: Nickel Plating

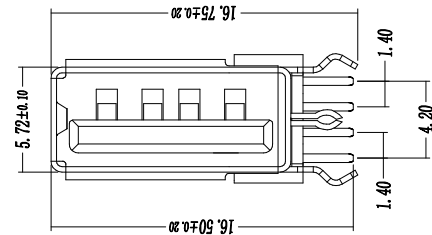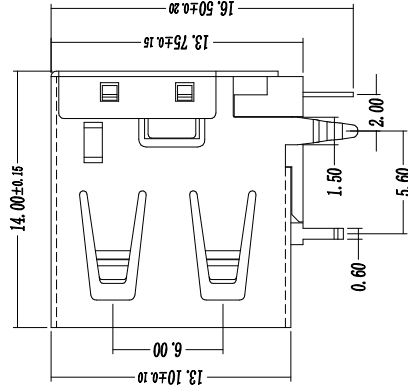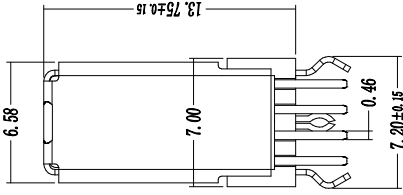

SECTION A-A

PCB LAYER: UT (Bottom View)

深圳市虹康科技有限公司



品名 (ITEM NO)	
料号 (PART NO)	SHK-20083
模号 (MODEL NO)	A008-11

图号 (DWG NO)		单位 (UNIT): MM
版本 (REV)	A/0	比例 (SCALE) 1:1
日期 (DATE)		公差 (TOLERANCE) UNSPECIFIED
设计 (DESIGN)		未注公差 (UNSPECIFIED TOLERANCE)
审核 (CHECKED)		X.X ±0.30
核准 (APPROVED)		X.XX ±0.20
		X.XXX ±0.10
		X.X° ±5°
		X.X° ±2°