
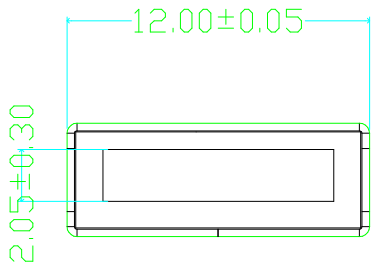
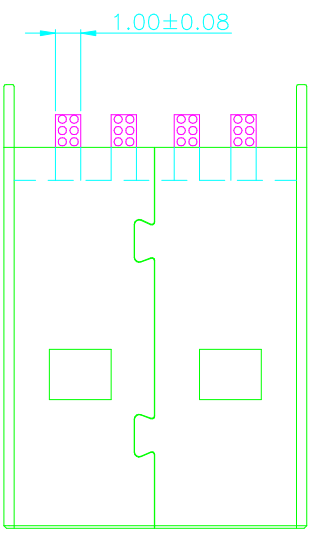
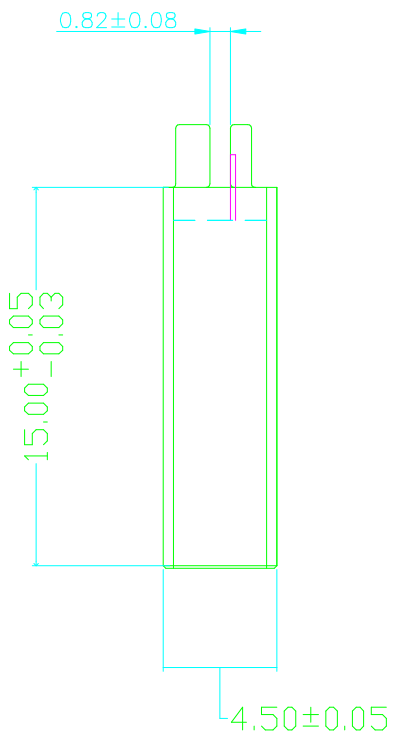


REV	LTR	DESCRIPTION	DATE	REVISER	APPD

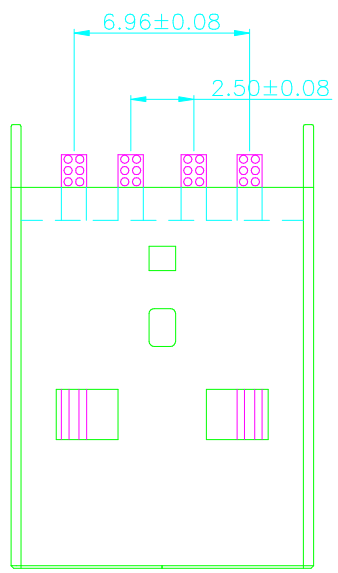

**特性: Specificationg:**  
**电器: Electrical:**  
 接触阻抗: Contact Resistance:  
 30 milliohms MAX  
 耐电压: Dielectric Withstanding Voltage:  
 100V AC AT Sea Level  
 绝缘阻抗: Insulation Resistance:  
 110 MEGA ohms MIN

**材料: Matorial:**  
 塑胶: Housing Hing Temperature Thermoplastics  
 PBT UL 94V-0塑胶  
 端子: Contact: C2680 (H65) 黄铜 T=0.2mm  
 外铁壳: Shell:SPCC 铁 T=0.3mm  
 端子: Contact:Plated Gold in Mating Area,  
 Tin On solder Talls  
 接触点镀金1U", 焊锡脚镀锡100-120U".  
 盐雾测试过24小时.

X.	±0.15	X.	±0.5°	
.X	±0.10	.X	±0.5°	
.XX	±0.03	.XX	±0.5°	
.XXX	±0.01	.XXX	±0.5°	

# 深圳市虹康科技有限公司

产品名称:		USB A2.0公短体夹板式			
SHK-20399		日期: 2015.11.1	图号		
核准:		日期:		版次	A
审核:		日期:		比例	1/1
绘图:		日期:		张数:	1

厚度:  

数量:  

THESE DRAWINGS AND SPECIFICATION ARE THE PROPERTY OF SKY HAWK COMPUTER GROUP. AND SHALL NOT BE COPYIED OR USED IN ANY MANNER WITHOUT THE PRIOR CONSENT.