

规格说明:Specifications:  
电气特性:Electrical:





- 额定电流: Current Rating  
1.5A/contact terminal
- 额定电压: Voltage Rating  
30V DC
- 接触阻抗: Contact Resistance  
30 milliohms MAX
- 耐电压: Dielectric Withstanding Voltage:  
500 V AC AT Sea Level
- 绝缘阻抗: Insulation Resistance:  
1000MEGA ohms MIN

物理性能: Mechanical:

- 插拔力: Connector Mate and Umate Force  
Mate force: 3.57kgf (MAX)  
Umate force: 1.02kgf (MIN)
- 端子保持力: Terminal Retention  
1.2kgf (MIN)

原材料: Material:

- 塑胶: Housing:  
Hing Temperature Thermoplastics,  
U1 94V-0 PBT White/Black
  - 端子: Contact: Copper Alloy C2680
  - 外壳: Shell: Copper Alloy C2680/SPCC
- 电镀: Finish:  
1. 端子: Contact: Plated Gold in Mating Area,  
Tin On Solder Tails  
2. 外壳: Shell: Nickel Plating

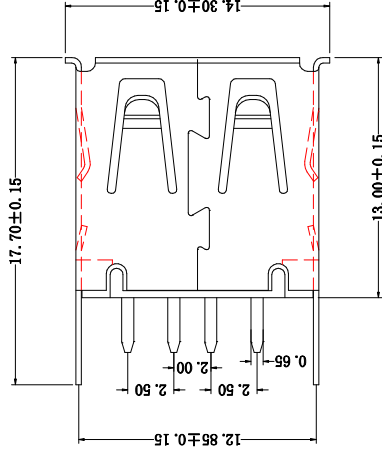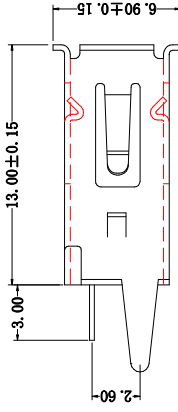

PCB LAYOUT

# 深圳市虹康科技有限公司

品名 (ITEM NO) AF 180 度 13.0 直角 卷边

料号 (PART NO) SHK-20072

模号 (MODEL NO) ZD-007

图号 (DWG NO)	版本 (REV)	日期 (DATE)	设计 (DESIGN)	审核 (CHECKED)	核准 (APPROVED)
	A/0	2016.06.08	李碧波		
单位 (UNIT): MM					
比例 (SCALE): 1:1					
未注公差 TOLERANCE UNSPECIFIED					
X.X ±0.30					
X.XX ±0.20					
X.XXX ±0.10					
X° ±5°					
X.X° ±2°					