

规格说明:Specifications:

电气特性:Electrical:





- 额定电流: Current Rating
1.5A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触阻抗: Contact Resistance
30 milliohms MAX
- 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

- 插拔力: Connector Mate and Umate Force
Mate force: 3.57kgf (MAX)
Umate force: 1.02kgf (MIN)
- 端子保持力: Terminal Retention
1.2kgf (MIN)

原材料: Matorial:

- 塑胶: Housing:
Hing Temperature Tnermaplastics,
U1 94V-0 PBT White/Black
 - 端子: Contact: Copper Alloy C2680
 - 外壳: Shell: Copper Alloy C2680/SPCC
- 电镀: Finish:
- 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails
 - 外壳: Shell: Nickel Plating

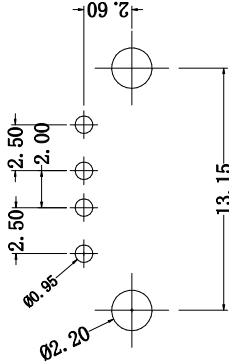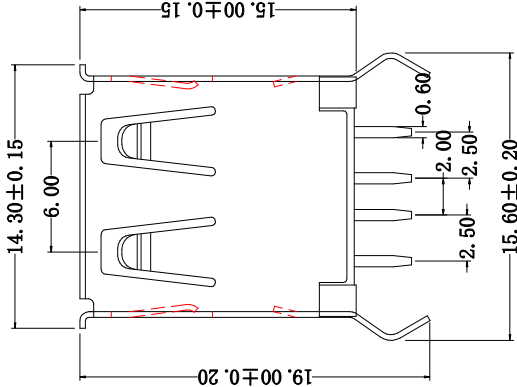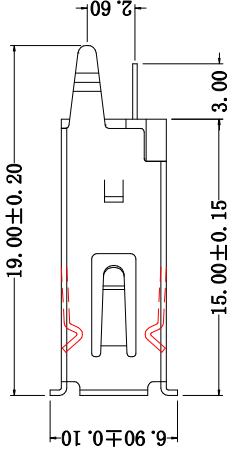

PCB LAYOUT

深圳市虹康科技有限公司



品名 (ITEM NO)	AF-180 度 15.0 弯脚 卷边
料号 (PART NO)	SHK-20074
模号 (MODEL NO)	ZD-003

图号 (DWG NO)		单位 (UNIT) : MM
版本 (REV)	A/0	比例 (SCALE) 1:1
日期 (DATE)	2016.06.08	
设计 (DESIGN)	李碧波	
审核 (CHECKED)		
核准 (APPROVED)		

未注公差
TOLERANCE UNSPECIFIED
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
X° ±5°
X.X° ±2°