

规格说明: Specifications:

电气特性: Electrical:

- 1. 额定电流: Current Rating
1.5A/contact terminal
- 2. 额定电压: Voltage Rating
30V DC
- 3. 接触阻抗: Contact Resistance
30 milliohms MAX
- 4. 耐压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 5. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:



- 1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf (MAX)
Unmate force: 1.02kgf (MIN)
- 2. 端子保持力: Terminal Retention
1. 2kgf (MIN)

原材料: Material:


- 1. 塑胶: Housing:
Hing Temperature Thermoplastics,
UI 94V-0 PBT White/Black
- 2. 端子: Contact: Copper Alloy C2680
- 3. 外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:


- 1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails
- 2. 外壳: Shell:
Nickel Plating

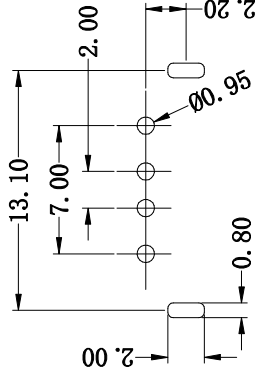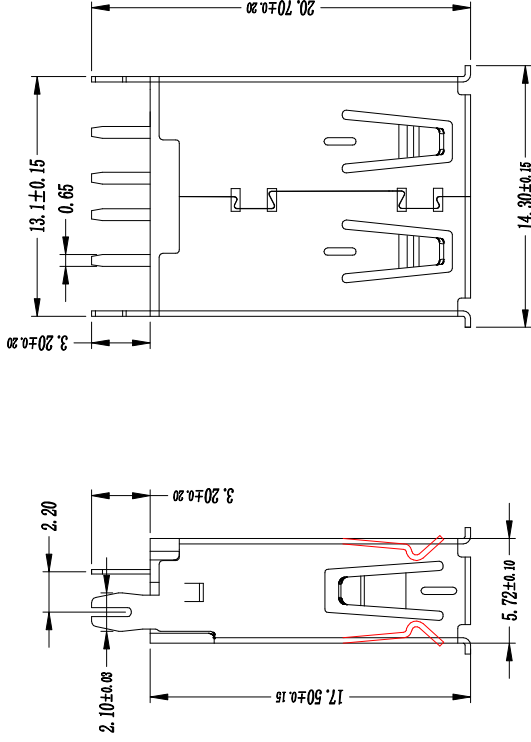

PCB LAYOUT

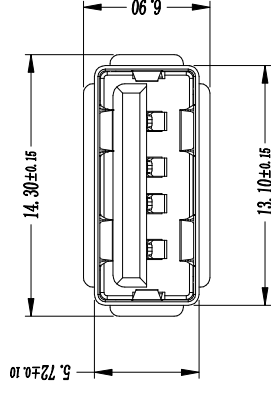

深圳市虹康科技有限公司



品名 (ITEM NO) USB AF 180 度 17.5 MM 卷边直脚

料号 (PART NO) SHK-20075

模号 (MODEL NO)

| | |
|---------------|----------------|
| 图号 (DWG NO) | 单位 (UNIT): MM |
| 版本 (REV) | 比例 (SCALE) 1:1 |
| 日期 (DATE) | 2016.05.08 |
| 设计 (DESIGN) | 邓爱平 |
| 审核 (CHECKED) | |
| 核准 (APPROVED) | |

| | |
|------------------|-------|
| 未注公差 | 公差 |
| X.X | ±0.30 |
| X.XX | ±0.20 |
| X.XXX | ±0.10 |
| X.X ^o | ±5° |
| X.X ^p | ±2° |