

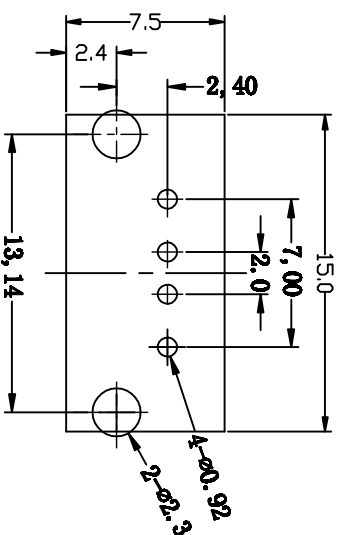
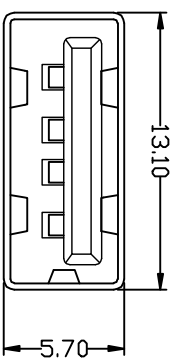
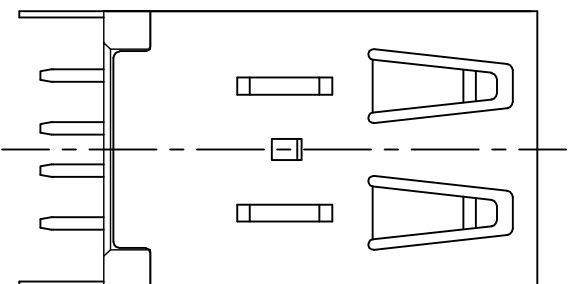


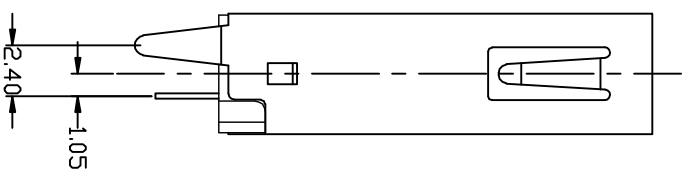

**Recommended P. C. B. Layout
Thickness: 1.6 MIN**

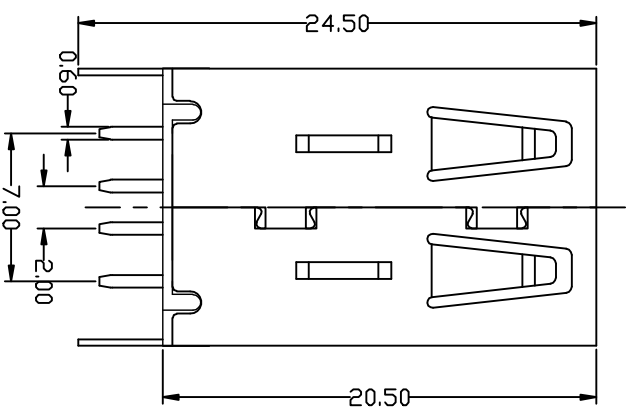

NOTES:

- ## 1. MATERIAL:

- ## 1.1 HOSTING:PBT BK:

- ## 1.2 CONTACTS: COPPER ALLOY ;

- ### 1.3 SHELL: STEEL ALLOY .

- ## 2. FINISHED:

SHELL: 500" MIN N1 UNDER PLATED OVER ALL;

CONTACTS: GOLD FLASH ON CONTACT AT&A

Tin 80u' MIN ON SOLDER ATTEL.

SPECIFICATIONS:

Contact current Rating: 1 Amperes.

DIELECTRIC Withstanding Voltage: AC 500V.

Insulation resistance: 1000M Ω Minimum.

Contact Resistance: 30mΩ Maximum

operating Temperature: -30°C to +85°C.

[illegible]

深圳市虹康科技有限公司