

REV	LTR	DESCRIPTION	DATE	APPROVED
A0		依新料号编码原则发行图面	20101125	zhao ci

NOTES:

1. MATERIAL SPECIFICATION:

- 1) HOUSING MATERIAL:SEE PART NO.
 - 2) SHELL MATERIAL:SEE PART NO. T:0.35mm
PLATING:SEE PART NO.
 - 3) BACK COVER MATERIAL:SPCC T:0.35mm
PLATING:NICKE.
 - 4) SHRAPNEL MATERIAL:SEE PART NO. T:0.25mm
 - 5) TERMINAL: COPPER ALLOY T:0.25mm
PLATING:SEE PART NO.
2. ELECTRICAL CHARACTERISTIC:
- 1) VOLTAGE CURRENT RATING: 1AMP, 30V DC;
 - 2) INSULATION RESISTANCE: 1000M Ω MIN;
 - 3) CONTACT RESISTANCE: 30m Ω MAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;

3. MECHANICAL:

- 1) MATING FORCE:3.57 KG MAX
- 2) UNMATING FORCE:1.02 KG MIN.

4. 02-1X XAX X XNX X XN-001

1 2 3 4 5 6 7 8

1:外壳材质代码: A:黄铜C2680, B:磷铜C5191,

D:单光铁 E:双光铁

2:外壳电镀代码: A:镀镍12H, B:镀镍24H, C:镀镍48H, D:镀雾镍

3:中夹片材质及电镀代码: A:SPCC 镀镍 E:黄铜 镀镍

I:磷铜 镀镍 K:不锈钢

L:不锈钢 镀镍

4:主体胶芯材质代码: A:PET, B:LCP, F:PA66

5:主体胶芯颜色代码: 1:白色 2:黑色 3.本色

6:端子材质代码: 1:黄铜C2680, 2:磷铜C5191,







7:端子电镀代码: A:半金锡G/F, B:半金锡3u",

C:半金锡15u", D:半金锡30u",

E:半金雾锡G/F, F:半金雾锡3u",

G:半金雾锡15u", H:半金雾锡30u",

8: 环保代码: N:非环保, R:ROHS, S:SONY, F:ROHS+无卤

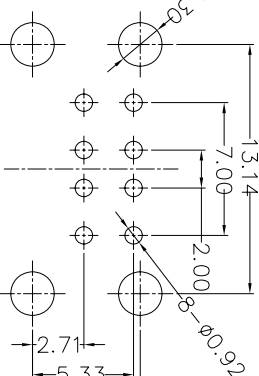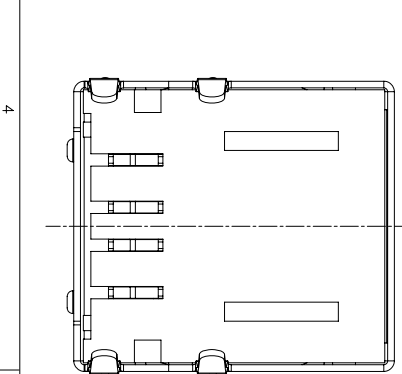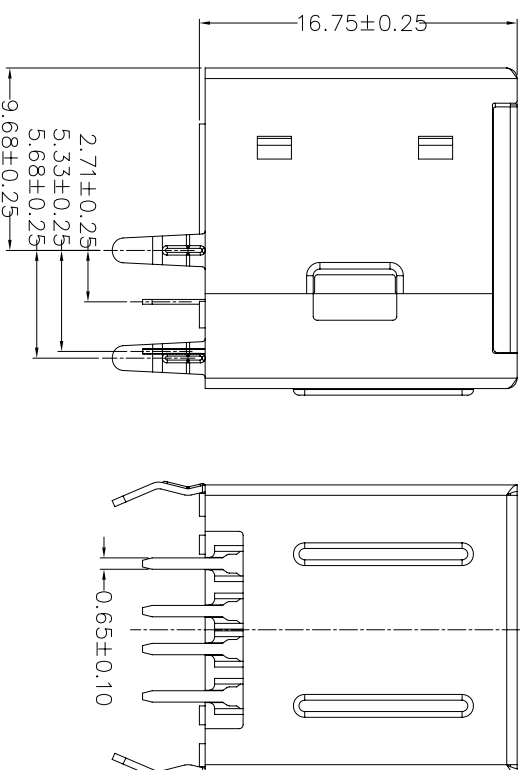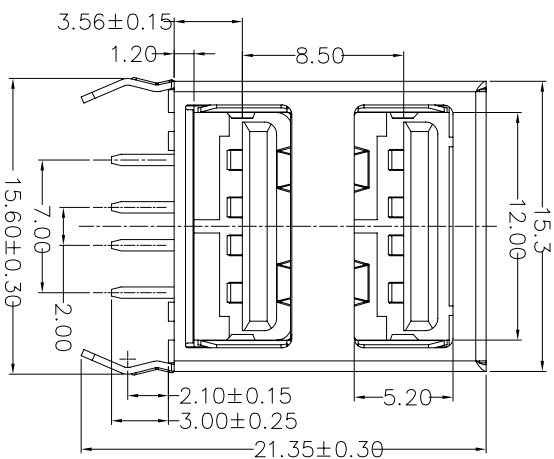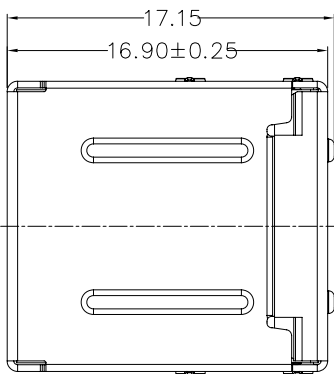

RECOMMEND P. C. B. LAYOUT

TOLERANCES		.X ±0.30		.XX ±0.20		.XXX ±0.10		ANGLES ±3.00°	
PART NO.:		DRAWING NO.:		REV.:		SIZE:		UNIT:	
AAPPD.:		021-001		A/0		A4		M M	
CHECK:		021-001		1:1		1:1		1/1	
DRAWN:		20101125							

深圳市虹康科技有限公司

USB A F双层全包代旁脚无弹

SHK-201012