
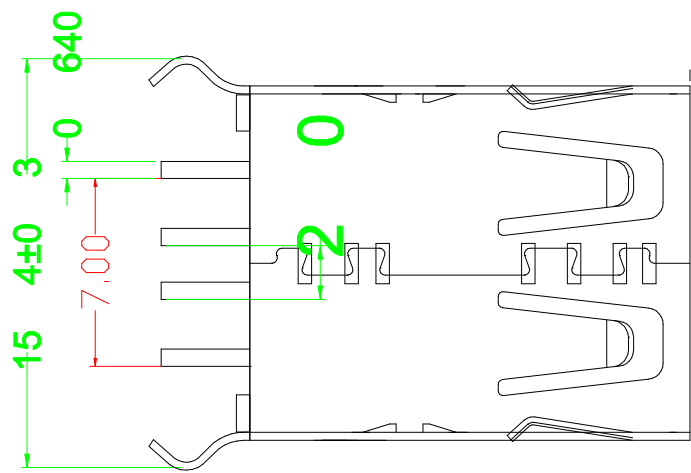
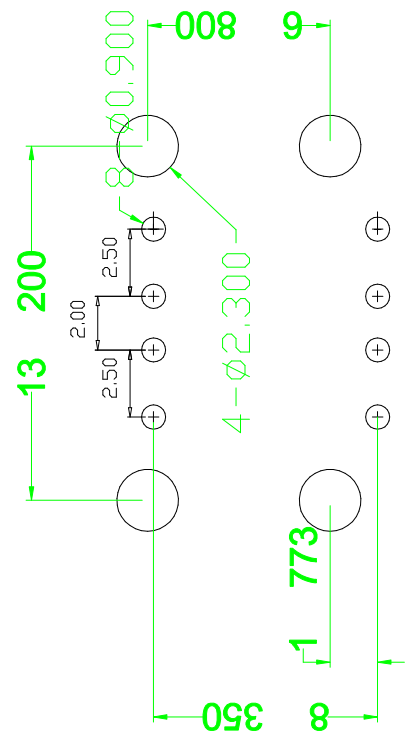
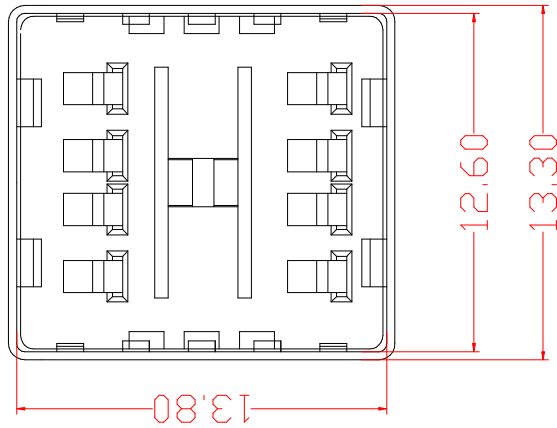


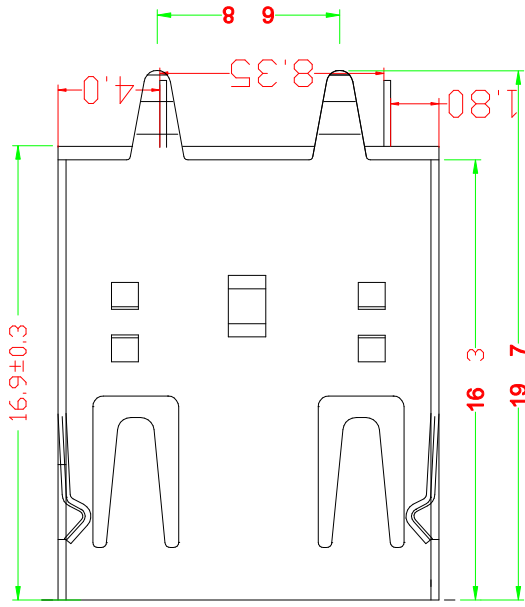

- 實跡供應:Specification: 1. 塗層: 1.5A/contact terminal 2. 塗層: 30V DC 3. 塗層: 30 milliohms MAX 4. 塗層: 500 V AC AT Sea Level 5. 塗層: 1000MEGA ohms MIN
- 易熔: Mechanical: 1. 層: 1.2kgf(MIN) 2. 層: 1.2kgf(MIN)
- 焊第: Material: 1. 層: PBT White/Black 2. 層: C-111-HtactC-111-pper A1H-1y C2680 3. 層: C-111-pper A1H-1y C2680/SPCC
- 實跡: Finish: 1. 層: Plated G-11d H-1y Math-1g Area: Tin On Solder Tails 2. 層: Nickel Plating

RECOMMENDED P. C. B. PATTERN LAY OUT

深圳市虹康科技有限公司

UNLESS OTHERWISE SPECIFIED TOLERANCE .X ±0.20 .XX ±0.15 .XXX ±0.10 ANG. ±2°	DRAWN H.Q.huocuy APPROVED	UNIT MM	USB AF 双层直插17.0MM弯脚直边
	DATE 2011.03.18	SCALE 3/1	PART NO. SHK-20130
		SIZE A4	DOC. NO. REV. A