
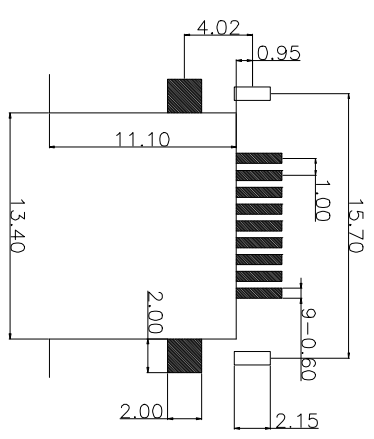
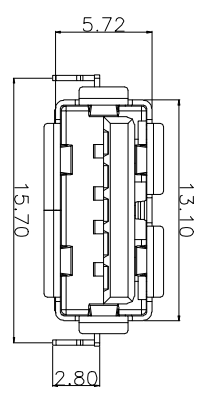

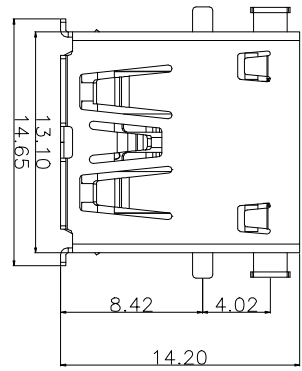



REV	LTR	DESCRIPTION	DATE	APPROVED
A0		依新料号编码原则发行图面	2015.07.20	LJ



PCB LAYOUT

**NOTES:**

**1. 材料:**

- 1.1: 外壳材质: 双光铁
- 1.2: 外壳电镀代码: 镀镍12H
- 1.3: 胶芯颜色代码: 蓝色
- 1.4: 胶芯材质&颜色: LCP蓝色
- 1.5: 端子材质: 磷铜.
- 1.6: 端子电镀: 半金锡G/F,

**2. 产品规格:**

- 2.1 额定电流: 1.5 A MIN 1PIN/4PIN 2.0A MAX
  - 2.2 绝缘阻抗: 1000M Ω MIN;
  - 2.3 接触阻抗: 30m Ω MAX;
  - 2.4 耐电压: 500V AC;
  - 2.5 工作温度: -55° C~+85° C
- 3. 插拔力性能要求:**
- 3.1, 插入力: 3.57Kgf Max;
  - 3.2, 拔出力: 1.02Kgf Min;
  - 3.3, "\*"为品管必须管控尺寸.
  - 3.4, 整套成品配合需顺畅.

**深圳市虹康科技有限公司**

TOLERANCES		TITLE:		REV.:		SIZE:		UNITS:		SCALE:		SHEET:	
.X	±0.30	USB A/F 3.0 沉板有卷边SMT		A/0	A4	MM	1:1	1/1					
.XX	±0.20	DRAWING NO.:		REV.:		SIZE:		UNITS:		SCALE:		SHEET:	
.XXX	±0.10	SHK-30144		A/0	A4	MM	1:1	1/1					
ANGLES ±3.00°		DRAWING NO.:		REV.:		SIZE:		UNITS:		SCALE:		SHEET:	
		SHK-30144		A/0	A4	MM	1:1	1/1					