
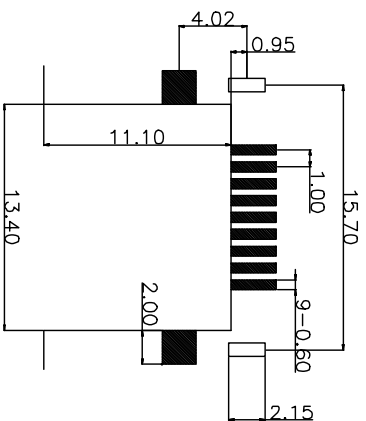
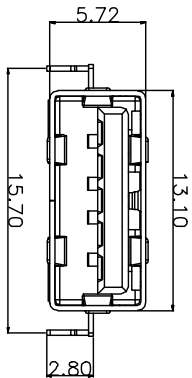


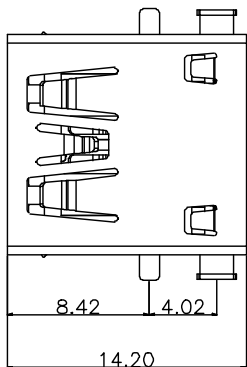


REV	LTR	DESCRIPTION	DATE	APPROVED
A0		依新料号编码原图发行图面	2015.07.20	LDJ



PCB LAYOUT

NOTES:

1. 材料

- 1.1: 外壳材质: 双光铁
- 1.2: 外壳电镀代码: 镀镍12H
- 1.3: 胶芯颜色代码: 蓝色
- 1.4: 胶芯材质&颜色: LCP蓝色
- 1.5: 端子材质: 磷铜.
- 1.6: 端子电镀: 半金锡G/F,

2. 产品规格:

- 2.1 额定电流: 1.5 A MIN 1PIN/4PIN 2.0A MAX
 - 2.2 绝缘阻抗: 1000MΩ MIN;
 - 2.3 接触阻抗: 30mΩ MAX;
 - 2.4 耐电压: 500V AC;
 - 2.5 工作温度: -55° C~+85° C
- 3. 插拔力性能要求:**
- 3.1, 插入力: 3.57Kgf Max;
 - 3.2, 拔出力: 1.02Kgf Min;
 - 3.3, "*"为品管必须管控尺寸.
 - 3.4, 整套成品配合需顺畅.

深圳市虹康科技有限公司

TOLERANCES	APPRD.:	DATE: 0	REV.:	SIZE: A4	UNIT: MM	SCALE: 1:1	SHEET: 1/1
.X ±0.30		USB A/F 3.0 抗板无卷边SMT					
.XX ±0.20	CHECK:	DRAWING NO.: 070914					
.XXX ±0.10	DRAWN:						
ANGLES ±3.00°							