


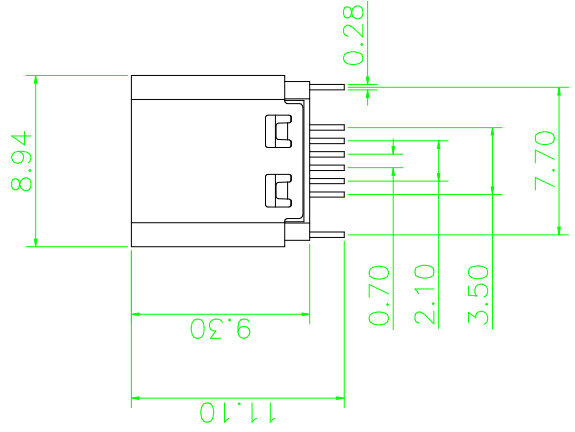


NOTES:
SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

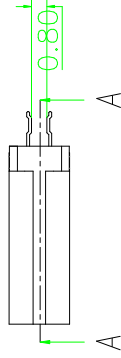

A-A

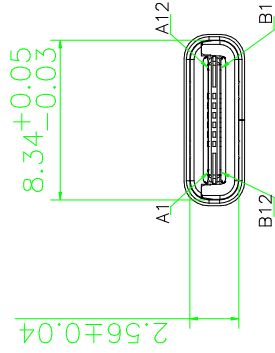

PTIN	Signal Name	PTIN	Signal Name
A1	GND	B12	GND
A2		B11	
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SUB2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SUB1	B5	CC2
A9	VBUS	B4	VBUS
A10		B3	
A11		B2	
A12	GND	B1	GND



第三角視角

公差:

- X. ±0.20 X° 3°
- .X ±0.10 .X° 1°
- .XX ±0.05

3	SHELL	STAINLESS STEEL	→ Plated	IPCS
2	C-→DUCT	COPPER ALLOY	Active/→ Plated	1SET
1	H-→UG	HIGH TEMPERATURE PLASTIC	BLACK	IPCS
MATERIAL				REMARKS
品名				USB3.1 (TYPE/C) 母座夾板式16P
單位	MM	比例	1:1	核准
日期	2016.11.25	版本	A01	審核
編號	SHK-31021	圖號	A4	設計
				尚學林

深圳市虹康科技有限公司