



REV.	DESCRIPTION	REV. NO.	DATE	DATE
A0	△新版发行		宋红	2019-04-24



B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

NOTES:

1. MATERIAL:
 - MOLDING: LCP UL94 V-0
 - CONTACT: COPPER ALLOY.
 - GOLD PLATED Min ON CONTACT AREA: 100u"
 - Min TIN (LEAD FREE) ON SOLDER AREA,
 - SHELL: COPPER ALLOY C2680, T=0.30±0.03mm
 - 50u" NICKEL PLATING OVER ALL.
2. MECHANICAL:
 - INSERTION: 5~20N.
 - EXTRACTION: 8~20N AFTER TEST.
 - DURABILITY: 10000 CYCLES
3. ELECTRICAL:
 - CURRENT: 3A FOR VBUS;
 - 1.25A FOR GND PIN.
 - 0.25A FOR OTHER.
 - VOLTAGE: 20 V MAX
 - WITHSTANDING VOLTAGE: 100V AC R.M.S.
 - CONTACT RESISTANCE: 40mΩ MAX.
 - INSULATION RESISTANCE: 100MΩ MIN.
4. ENVIRONMENTAL
 - TEMPERATURE RANGE -25°C ~ +85°C
5. 尺寸标注事项:
 - “*”为首样全检, 重点管控尺寸.
 - 图示有标注“*”者为首样全检, 重点管控尺寸.
6. 产品符合 RoHS 标准

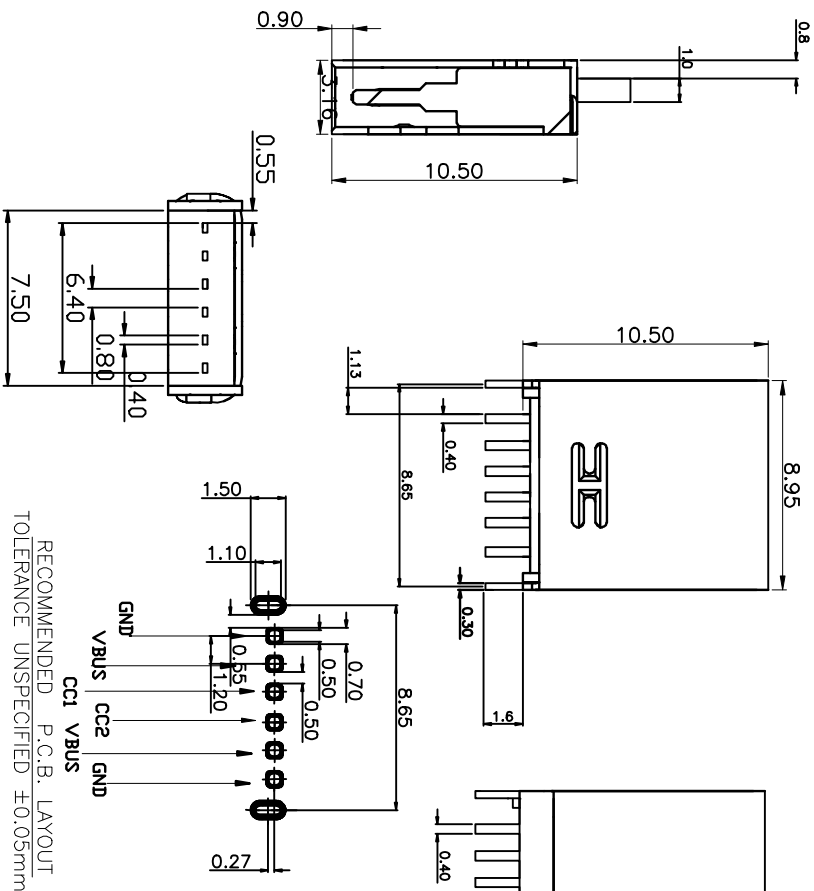

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

深圳市虹康科技有限公司

.X: ±0.35	.X*: ±1.5*	INTENDED USE: 连接器	ARTICLE: 连接器
.XX: ±0.25	.XX*: ±1.0*		
.XXX: ±0.20	.XXX*: ±0.5*	APPR.:	
MAT'L: SEE NOTES	DR.:	Len Song	
FINISH:			

PART NO.:	SEE TABLE
DRG. NO.:	T16-000X
SCALE:	1:1
UNIT:	mm
REV.:	A0